

SPECIFICATIONS


CUSTOMER	:	
SAMPLE CODE	:	SH800480T007-IHA
MASS PRODUCTION CODE	:	PH800480T007-IHA
SAMPLE VERSION	:	02
SPECIFICATIONS EDITION	:	005
DRAWING NO. (Ver.)	:	LMD- PH800480T007-IHA (Ver.004)
PACKAGING NO. (Ver.)	:	PKG- PH800480T007-IHA (Ver.001)

Customer Approved

Date:

Approved	Checked	Designer
黃秋源 Oliver Huang	石建莊 Stone Shin	王聖硯 Stephen Wang

- ☐ Preliminary specification for design input
☒ Specification for sample approval



POWERTIP TECH. CORP.

Headquarters: No.8, 6 th Road, Taichung Industrial Park, Taichung, Taiwan 台中市 407 工業區六路 8 號	TEL: 886-4-2355-8168 FAX: 886-4-2355-8166	E-mail: sales@powertip.com.tw Http://www.powertip.com.tw
---	--	--

PH800480T007-IHA

Contents

1. SPECIFICATIONS

- 1.1 Features**
- 1.2 Mechanical Specifications**
- 1.3 Absolute Maximum Ratings**
- 1.4 DC Electrical Characteristics**
- 1.5 Optical Characteristics**
- 1.6 Backlight Characteristics**

2. MODULE STRUCTURE

- 2.1 Counter Drawing**
- 2.2 Interface Pin Description**
- 2.3 Timing Characteristics**

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart**
- 3.2 Inspection Specification**

4. RELIABILITY TEST

- 4.1 Reliability Test Condition**

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety**
- 5.2 Handling**
- 5.3 Storage**
- 5.4 Terms of Warranty**

Appendix : LCM Drawing
LCM Packaging Specifications

Source IC: HX8262-A 、 Gate IC : HX8678-A

Note: For detailed information please refer to IC datasheet.

1. SPECIFICATIONS

1.1 Features

Item	Standard Value
Screen Size(inch)	7.0 inch
Resolution	800* (R 、 G 、 B) * 480 Dots
Display Mode	a-Si TFT, Normally White, Transmissive
Viewing Direction	6 O'Clock
Color Configuration	RGB-Strip
Backlights Type	White LED B/L
Interface	RGB
Weight	147.0 g
Controller	Source IC: HX8262-A 、 Gate IC:HX8678-A
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer website : http://www.powertip.com.tw/news_detail.php?Key=1&cID=1

1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	165.0 (W) * 104.44 (L) * 5.2 (H)	mm

LCD panel

Item	Standard Value	Unit
Active Area	152.4 (W) * 91.44 (L)	mm

Note: For detailed information please refer to LCM drawing.

1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage	VCC	GND=0	-0.3	+7.0	V
	VDD		-0.3	+50.0	V
Operating Temperature	T _{OP} (Ts)	Note 1	-20	+70	°C
Storage Temperature	T _{ST} (Ta)	Note 2	-30	+80	°C
Storage Humidity	H _D	Ta < 25 °C	-	90	%RH

Note 1 : Ts is the temperature of panel's surface

Note 2 : Ta is the ambient temperature of samples

1.4 DC Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply for TFT Panel	VCC	GND=0V	3.0	3.3	3.6	V
Power Supply for Backlight Unit	VDD		11.5	12.0	12.5	V
Input Voltage for TFT Panel	V _{IH}		0.7*VCC	-	VCC	V
	V _{IL}		0	-	0.3*VCC	V
Supply Current for TFT Panel	ICC	VCC=3.3V	-	150	250	mA
Supply Current for Backlight Unit	IDD	VDD=12V	-	400	450	mA
Logic Interface for Backlight Driver	V _{IL}	GND=0V	-	-	0.4	V
	V _{IH}		1.65	-	-	V
PWM	V _{PWM}		0	-	5.25	V
Dimming Clock Rate	f _{PWM}		100	-	20000	Hz

Note1: Maximum current for RGB full-display.

1.5 Optical Characteristics

TFT LCD Panel

VCC=3.3V , Ta=25℃

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	-
Response Time	Tr + Tf	-	-	30	40	ms	Note2
Viewing Angle	Top	ΘY+	-	60	-	Deg.	Note4
	Bottom	ΘY-	-	60	-		
	Left	ΘX-	-	60	-		
	Right	ΘX+	-	60	-		
Contrast Ratio	CR		500	600	-	-	Note3
Color of CIE Coordinate (With B/L)	White	X	0.25	0.30	0.35	-	Note1
		Y	0.26	0.31	0.36		
	Red	X	0.60	0.65	0.70		
		Y	0.29	0.34	0.39		
	Green	X	0.25	0.30	0.35		
		Y	0.58	0.63	0.68		
	Blue	X	0.10	0.15	0.20		
		Y	0.01	0.06	0.11		
Average Brightness Pattern=White Display	IV	IF= 120 mA	800	1000	-	cd/m2	Note1
Luminance Uniformity	YU	IF= 120 mA	70	-	-	%	Note1

Note1:

1 : $\Delta B = B(\min) / B(\max) \times 100\%$



2 : Measurement Condition for Optical Characteristics:

a : Environment: 25℃±5℃ / 60±20%R.H , no wind , dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 ± 50 mm , (θ= 0°)

c : Equipment: TOPCON BM-7 fast , (field 1°) , after 10 minutes operation.


d : The uncertainty of the C.I.E coordinate measurement ±0.01 , Average Brightness ± 4%

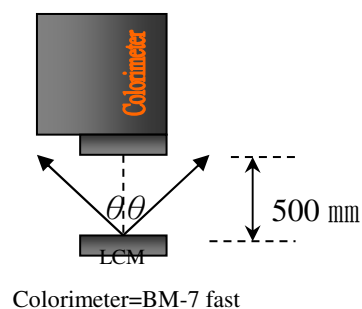

Note2: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

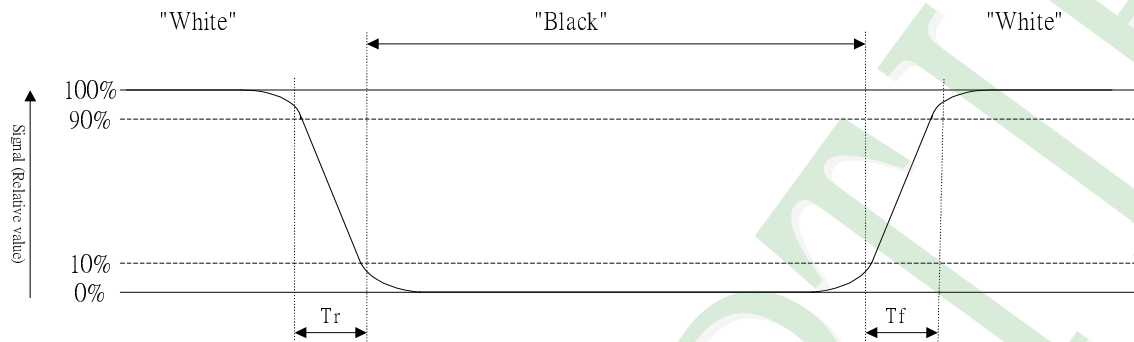


Note3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note4: Definition of viewing angle:

Refer to figure as below:

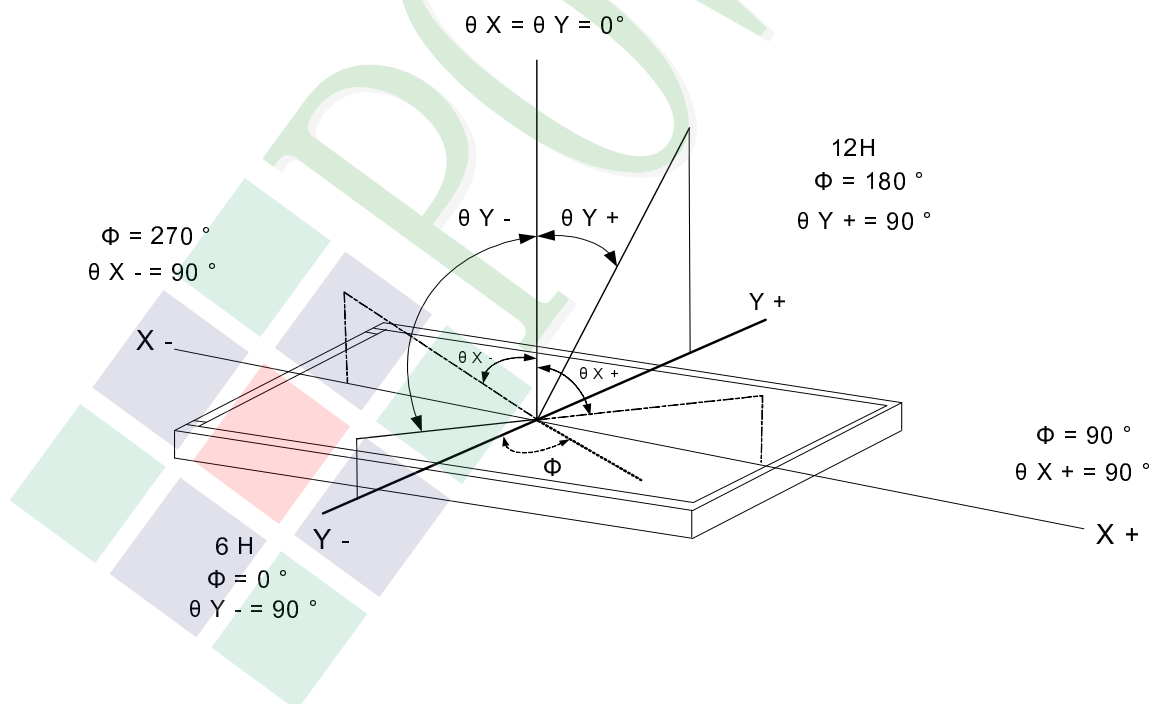

1.6 Backlight Characteristics

Maximum Ratings


Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Power Dissipation	Pd	-	-	380	-	mW
LED Forward Current	IF	1 LED	-	-	120	mA
LED Reverse Voltage	VR	1 LED	-	-	1.2	V

Electrical / Optical Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Voltage for LED Backlight	VF	If=120mA	24.3	26.1	27.0	V
Current for LED Backlight	IF		-	120	-	mA
Color	White					

Other Description

Item	Conditions	Description
Life Time	Ta =25°C If= 120 mA	50000 hrs.

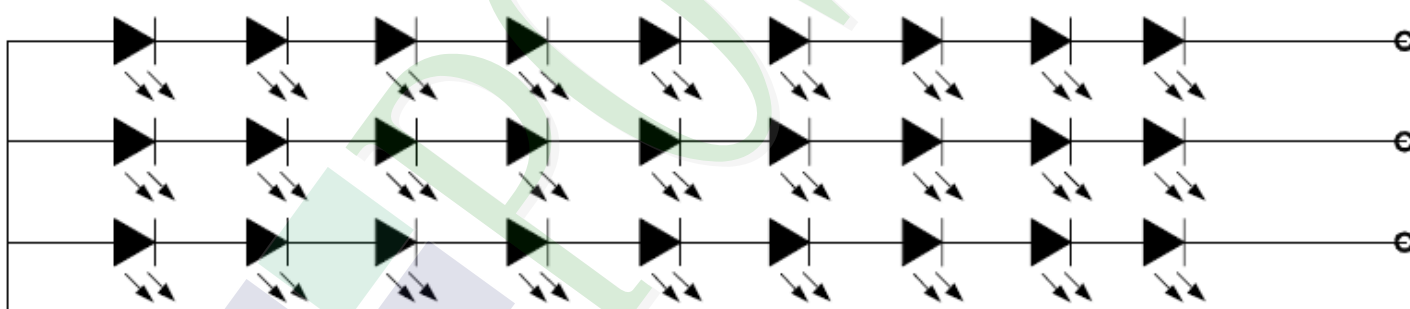


2. MODULE STRUCTURE

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix

2.1.2 Block Diagram

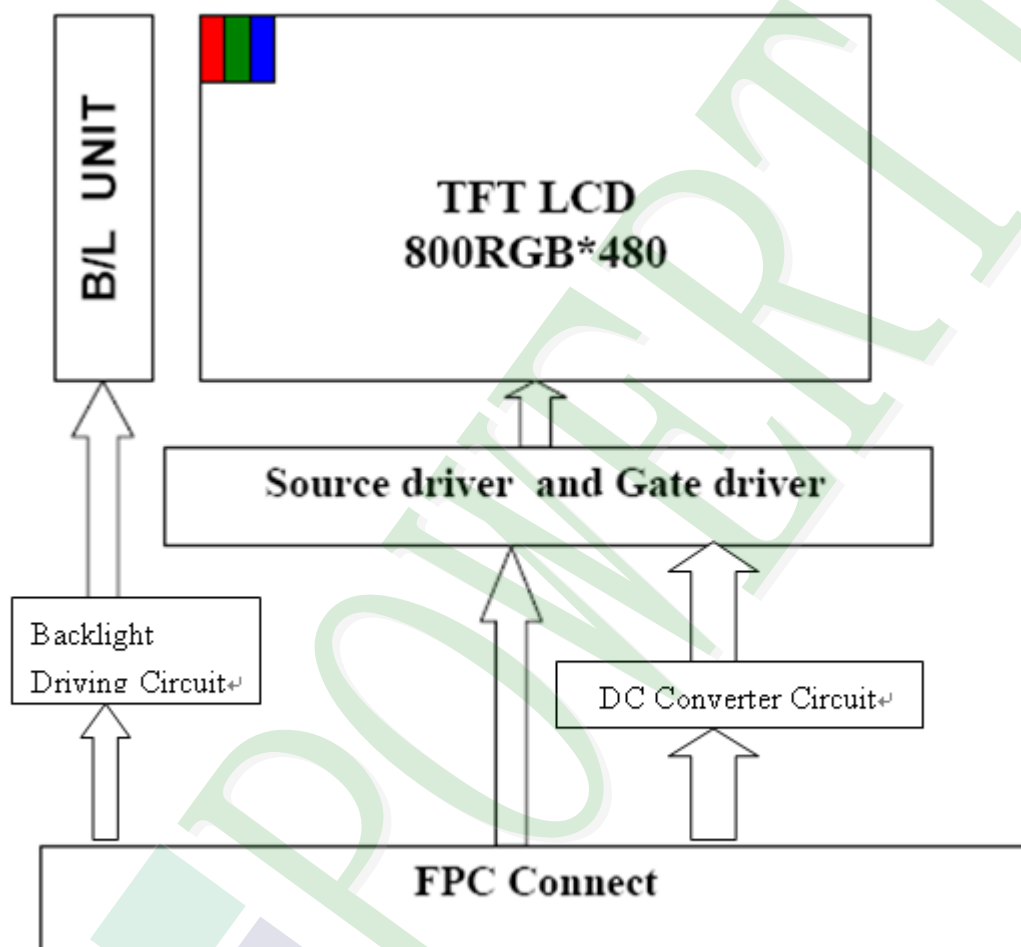

2.2 Interface Pin Description

Pin#	Name	DESCRIPTION
1	GND	Power Ground
2	VCC	Power for Digital Circuit
3	VCC	Power for Digital Circuit
4	VDD	Power For LED backlight
5	VDD	Power For LED backlight
6	VPWM	Shutdown & Dimming control input for backlight Do not allow this pin to float, (default active to 3.3v) “Hi” =100%, “Low” = 0%
7	GND	Power Ground
8	R0	Red Data
9	R1	Red Data
10	R2	Red Data
11	R3	Red Data
12	GND	Power Ground
13	R4	Red Data
14	R5	Red Data
15	R6	Red Data
16	R7	Red Data
17	GND	Power Ground
18	G0	Green Data
19	G1	Green Data
20	G2	Green Data
21	G3	Green Data
22	GND	Power Ground
23	G4	Green Data
24	G5	Green Data
25	G6	Green Data
26	G7	Green Data
27	GND	Power Ground
28	B0	Blue Data
29	B1	Blue Data

Pin#	Name	DESCRIPTION
30	B2	Blue Data
31	B3	Blue Data
32	GND	Power Ground
33	B4	Blue Data
34	B5	Blue Data
35	B6	Blue Data
36	B7	Blue Data
37	GND	Power Ground
38	HSYNC	Horizontal Synchronization Signal Input
39	VSYNC	Vertical Synchronization Signal Input
40	GND	Power Ground
41	DE	Data Enable
42	GND	Power Ground
43	DCLK	CLK polarity is inverted, latch data by falling edge of CLK
44	GND	Power Ground
45	CS(NC) / ID1	No Function./ ID[4:1] These pins select LCM type
46	SDIN(NC) / ID2	No Function./ ID[4:2] These pins select LCM type
47	SCK(NC) / ID3	No Function ./ ID[4:3] These pins select LCM type
48	DISPLAY CONTROL(NC) / ID4	No Function ./ ID[4:4] These pins have a no connection
49	RESET	Global Reset (Low Active)
50	GND	Power Ground

2.3 Timing Characteristics



● Sync mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	F_{CPH}	-	33.26	-	MHz
CLK period	T_{CPH}	-	30.06	-	ns
CLK pulse duty	T_{CWH}	40	50	60	%
HS period	T_H	930	1056	1057	T_{CPH}
HS pulse width	T_{WH}	1	128	-	T_{CPH}
HS-first horizontal data time	T_{HS}	STHD[7:0]+88			T_{CPH}
HS Active Time	T_{HA}	-	800	-	T_{CPH}
VS period	T_V	-	525	-	T_H
VS pulse width	T_{WV}	1	2	-	T_H
VS-DE time	T_{VS}	STVD[6:0]+8			T_H
VS Active Time	T_{VA}	-	480	-	T_H


● DE mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	F_{CPH}	-	33.26	-	MHz
CLK period	T_{CPH}	-	30.06	-	ns
CLK pulse duty	T_{CWH}	40	50	60	%
DE period	$T_{DEH}+T_{DEL}$	1000	1056	1200	T_{CPH}
DE pulse width	T_{DEH}	-	800	-	T_{CPH}
DE frame blanking	T_{DEB}	10	45	110	$T_{DEH}+T_{DEL}$
DE frame width	T_{DE}	-	480	-	$T_{DEH}+T_{DEL}$


Data Input Format

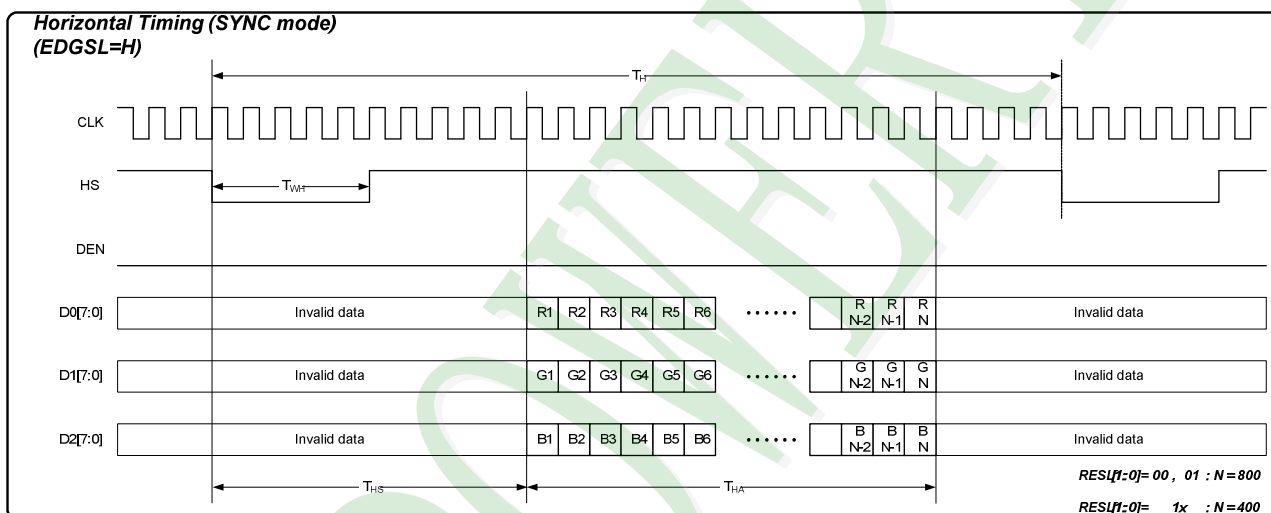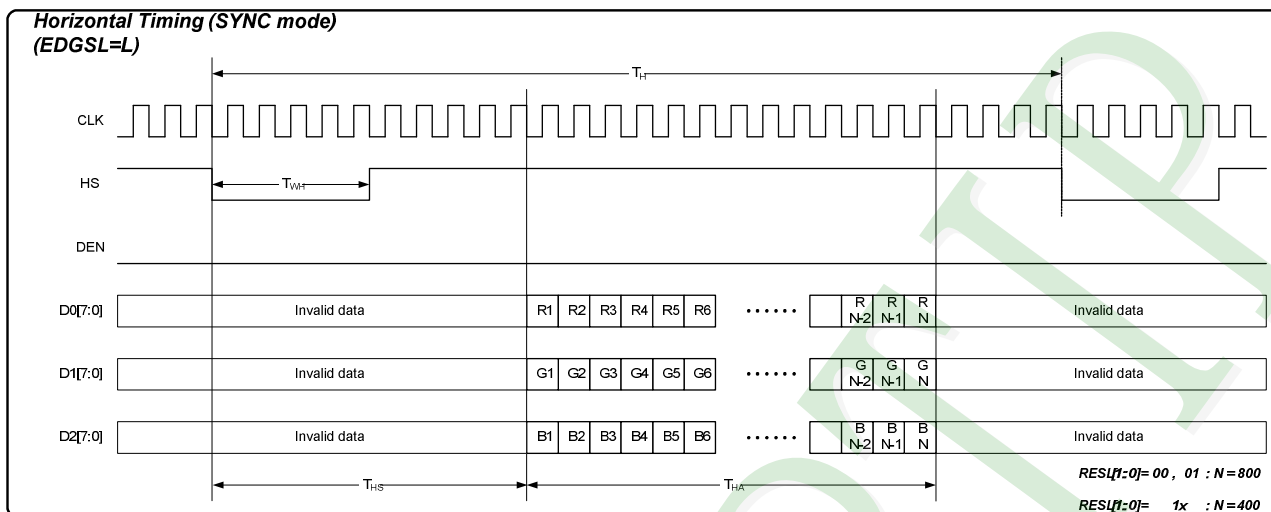

SYNC Mode Horizontal Data Format

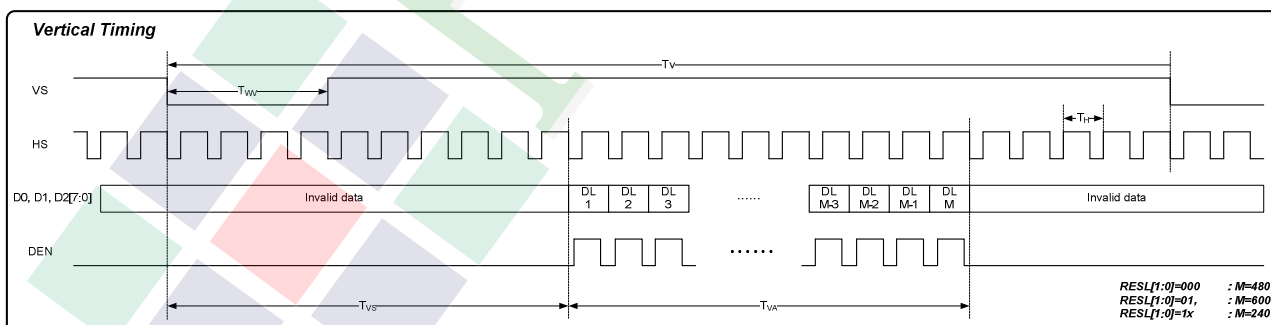


SYNC Mode Vertical Data Format

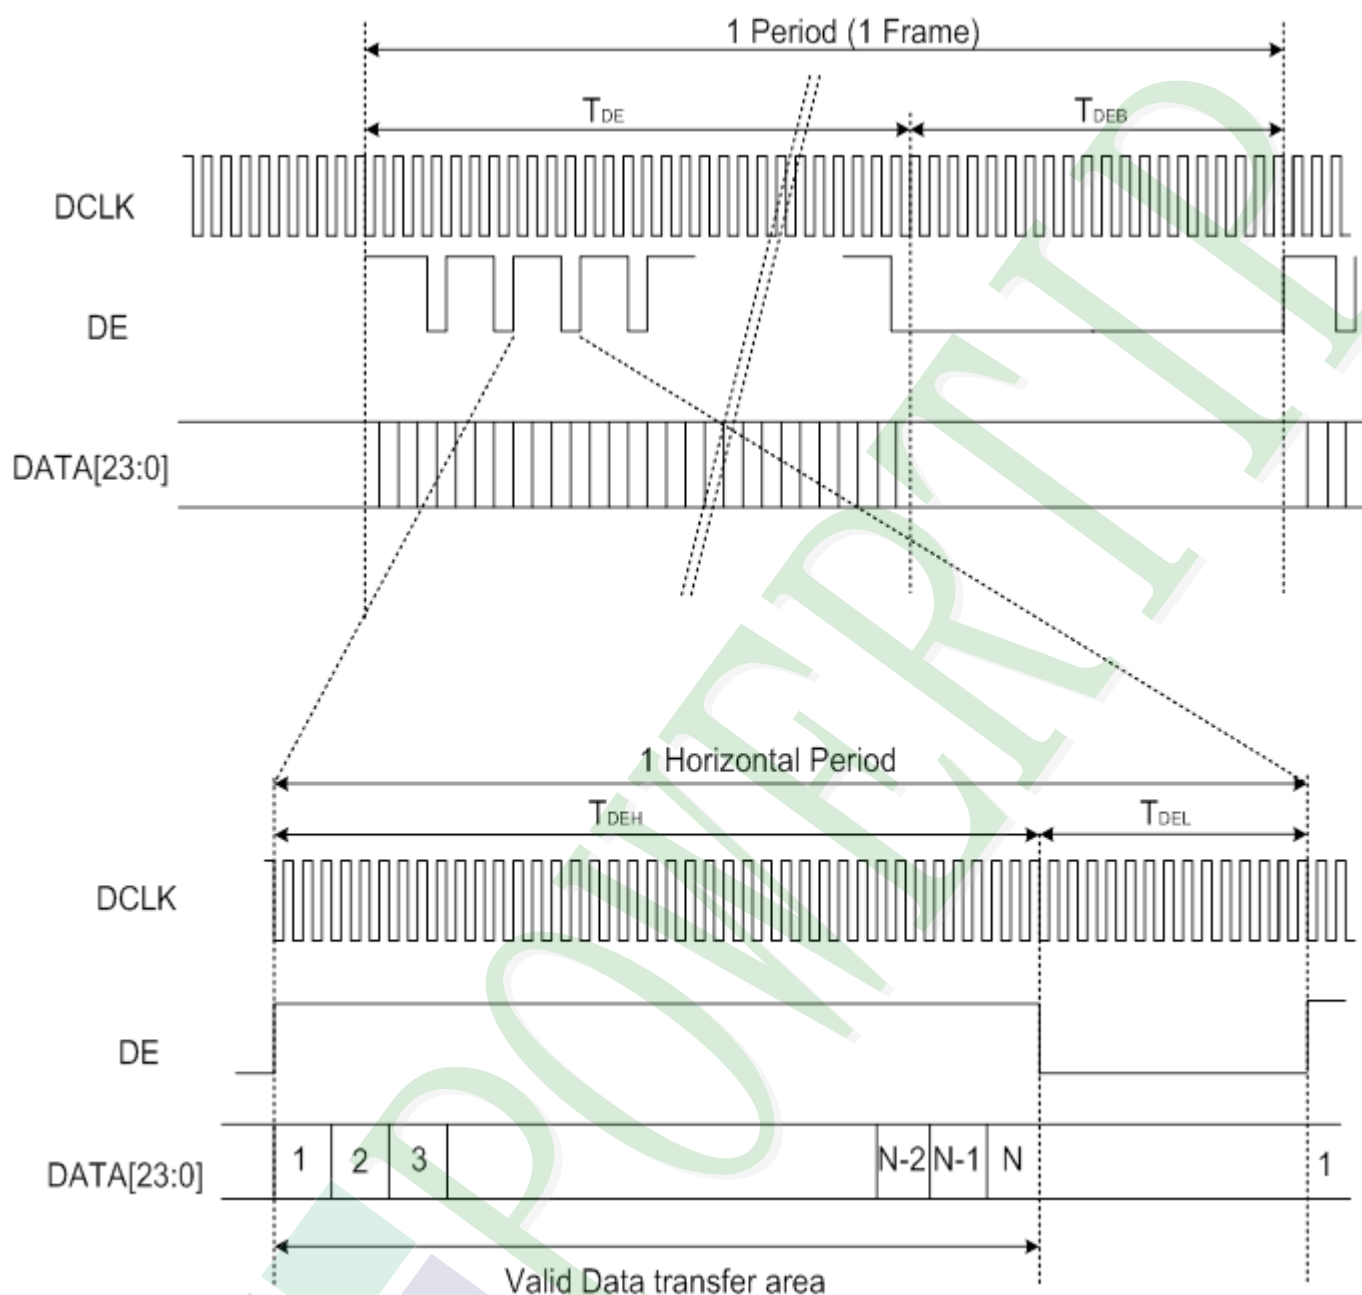


DE Mode Data Format

3. QUALITY ASSURANCE SYSTEM

3.1 Quality Assurance Flow Chart

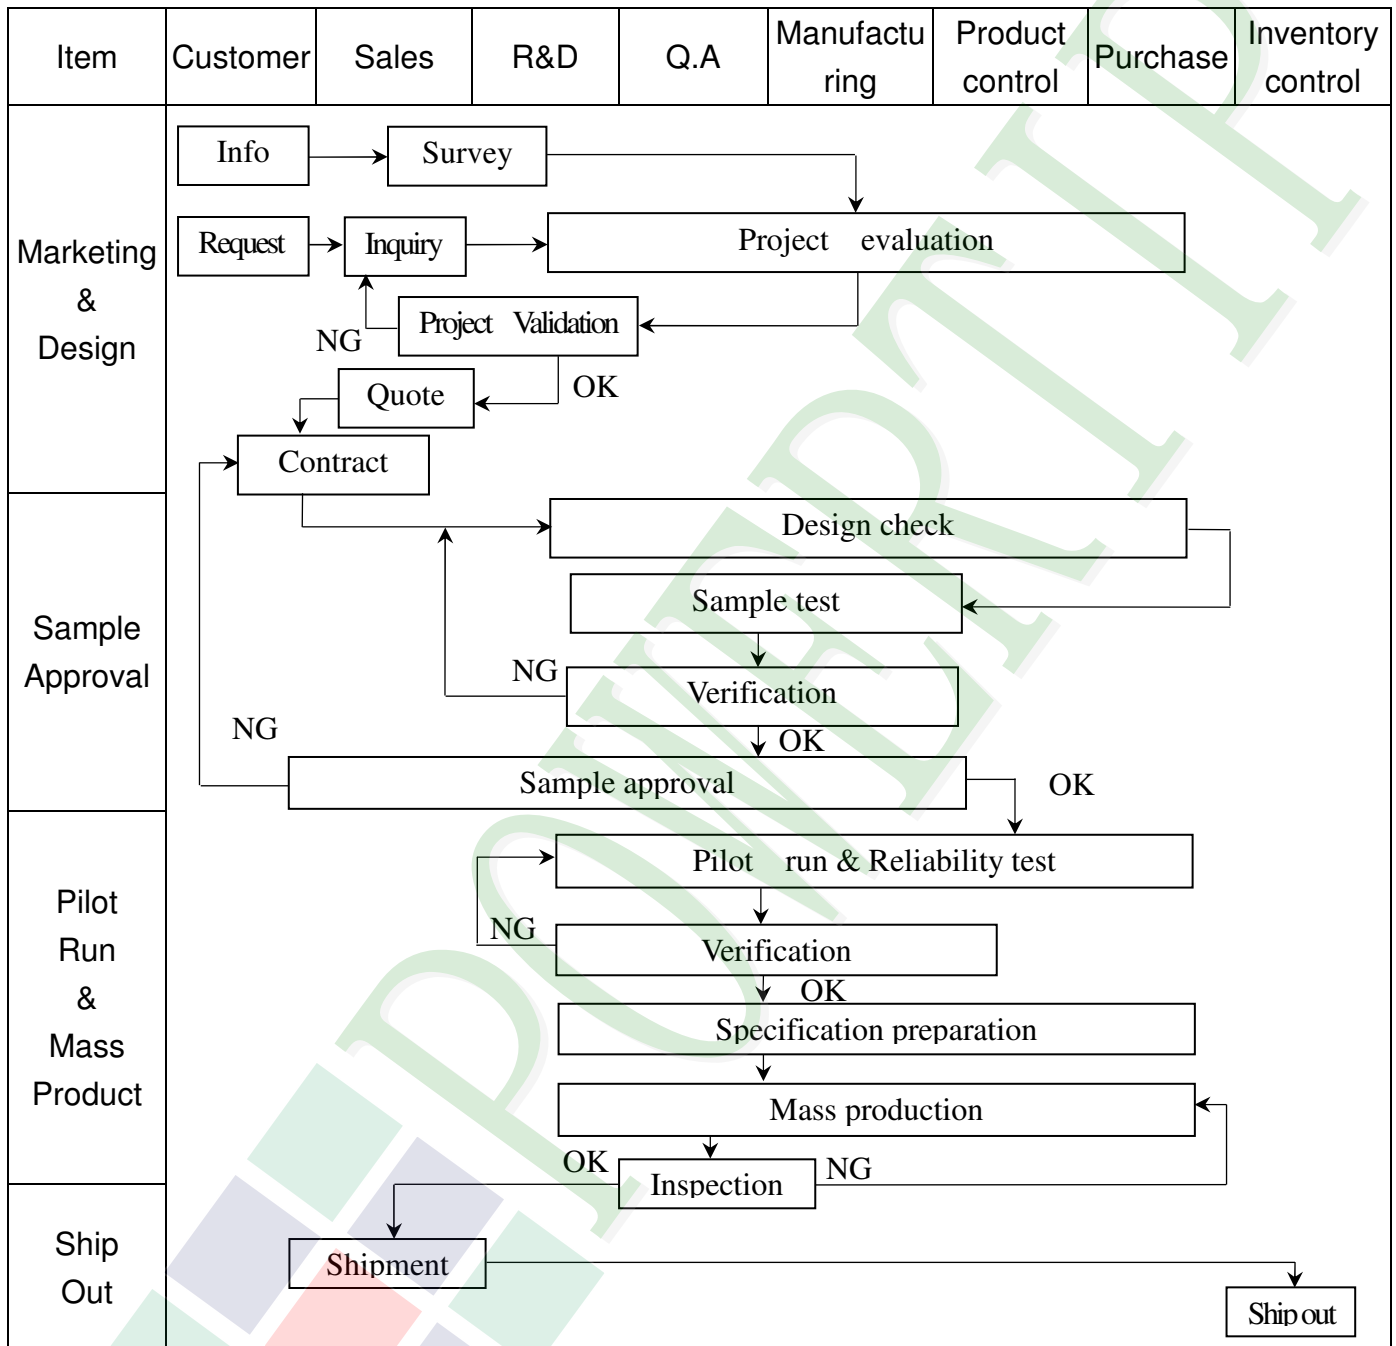

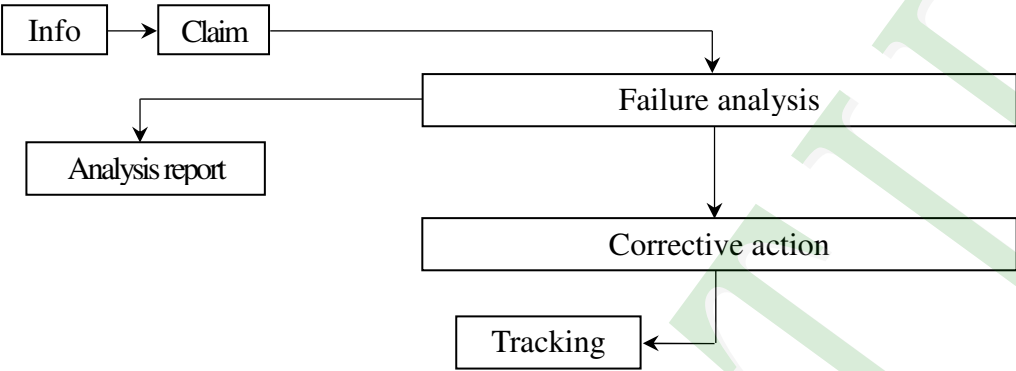Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Failure --> Analysis[Analysis report] Failure --> Corrective[Corrective action] Corrective --> Tracking[Tracking] </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

3.2. Inspection Specification


- ◆Scope: The document shall be applied to TFT-LCD Module for 3.5" ~15" (Ver.B01).
- ◆Inspection Standard: MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆Equipment: Gauge, MIL-STD, Powertip Tester, Sample
- ◆Defect Level: Major Defect AQL: 0.4; Minor Defect AQL: 1.5
- ◆OUT Going Defect Level: Sampling.
- ◆Standard of the product appearance test:

a. Manner of appearance test:


(1). The test best be under 20W×2 fluorescent light(about 300lux ~500lux)

, and distance of view must be at 30~40 cm.

(2). The test direction is base on about around 45° of vertical line.

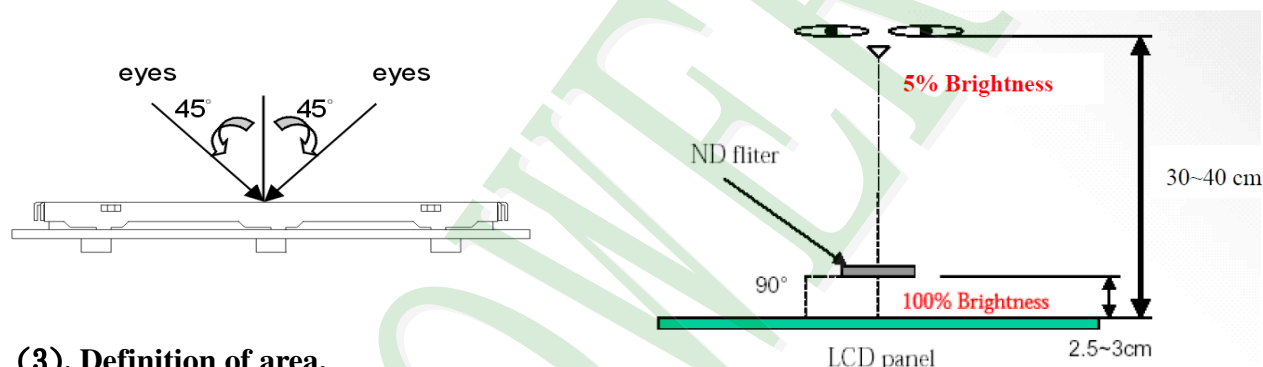

(3). Definition of area.

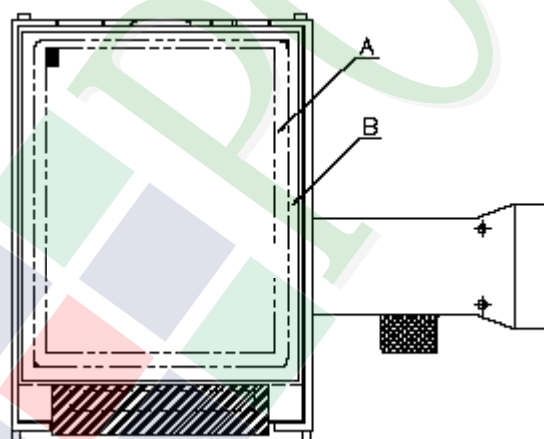

A area: viewing area

B area: Outside of viewing area

(4). Standard of inspection : (Unit : mm)



◆ Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

NO	Item	Criterion	Level												
01	Product condition	1. 1The part number is inconsistent with work order of production.	Major												
		1. 2 Mixed product types.	Major												
		1. 3 Assembled in inverse direction.	Major												
02	Quantity	2. 1The quantity is inconsistent with work order of production.	Major												
03	Outline dimension	3. 1Product dimension and structure must conform to structure diagram.	Major												
04	Electrical Testing	4. 1 Missing line character and icon.	Major												
		4. 2 No function or no display.	Major												
		4. 3 Display malfunction.	Major												
		4. 4 LCD viewing angle defect.	Major												
		4. 5 Current consumption exceeds product specifications.	Major												
		4. 6Mura cannot be seen through 5% ND filter at 50% Gray , should be judged by the viewing angle of 90 degree.	Minor												
05	Dot defect (Bright dot, Dark dot) On -display	<table><tr><th colspan="2">Item</th><th>Acceptance (Q'ty)</th></tr><tr><td rowspan="4">Dot Defect</td><td>Bright Dot</td><td>≤ 4</td></tr><tr><td>Dark Dot</td><td>≤ 5</td></tr><tr><td>Joint Dot</td><td>≤ 3</td></tr><tr><td>Total</td><td>≤ 7</td></tr></table>	Item		Acceptance (Q'ty)	Dot Defect	Bright Dot	≤ 4	Dark Dot	≤ 5	Joint Dot	≤ 3	Total	≤ 7	Minor
		Item		Acceptance (Q'ty)											
Dot Defect	Bright Dot	≤ 4													
	Dark Dot	≤ 5													
	Joint Dot	≤ 3													
	Total	≤ 7													
5. 1 Inspection pattern: full white, full black, Red, <u>Green</u> and blue screens. 5. 2 It is defined as dot defect if defect area $>1/2$ dot. 5. 3 The distance between two dot defect ≥ 5 mm. 5. 4 Bright dot that can not be seen through 5% ND filter.															

◆ Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

NO	Item	Criterion	Level																																																							
06	Black or white Dot, scratch, contamination Round type  $\Phi = (x + y) / 2$ Line type 	6. 1 Round type (Non-display or display): <table><tr><th rowspan="2">Dimension (diameter : Φ)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td>$\Phi \leq 0.25$</td><td>Ignore</td><td rowspan="3">Ignore</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td>5</td></tr><tr><td>$\Phi > 0.50$</td><td>0</td></tr><tr><td>Total</td><td>5</td><td></td></tr></table> 6. 2 Line type(Non-display or display): <table><tr><th rowspan="2">module size</th><th rowspan="2">Length (L)</th><th rowspan="2">Width (W)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td rowspan="5">3.5" to less 9"</td><td>---</td><td>$W \leq 0.03$</td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>$L \leq 10.0$</td><td>$0.03 < W \leq 0.05$</td><td>4</td></tr><tr><td>$L \leq 5.0$</td><td>$0.05 < W \leq 0.10$</td><td>2</td></tr><tr><td>---</td><td>$W > 0.10$</td><td>As round type</td></tr><tr><td colspan="2">Total</td><td>5</td><td></td></tr><tr><td rowspan="4">9" to 15"</td><td>---</td><td>$W \leq 0.05$</td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>$L \leq 10.0$</td><td>$0.05 < W \leq 0.10$</td><td>5</td></tr><tr><td>---</td><td>$W > 0.10$</td><td>As round type</td></tr><tr><td colspan="2">Total</td><td>5</td><td></td></tr></table>	Dimension (diameter : Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	5	$\Phi > 0.50$	0	Total	5		module size	Length (L)	Width (W)	Acceptance (Q'ty)		A area	B area	3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore	$L \leq 10.0$	$0.03 < W \leq 0.05$	4	$L \leq 5.0$	$0.05 < W \leq 0.10$	2	---	$W > 0.10$	As round type	Total		5		9" to 15"	---	$W \leq 0.05$	Ignore	Ignore	$L \leq 10.0$	$0.05 < W \leq 0.10$	5	---	$W > 0.10$	As round type	Total		5		Minor
Dimension (diameter : Φ)	Acceptance (Q'ty)																																																									
	A area	B area																																																								
$\Phi \leq 0.25$	Ignore	Ignore																																																								
$0.25 < \Phi \leq 0.50$	5																																																									
$\Phi > 0.50$	0																																																									
Total	5																																																									
module size	Length (L)	Width (W)	Acceptance (Q'ty)																																																							
			A area	B area																																																						
3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore																																																						
	$L \leq 10.0$	$0.03 < W \leq 0.05$	4																																																							
	$L \leq 5.0$	$0.05 < W \leq 0.10$	2																																																							
	---	$W > 0.10$	As round type																																																							
	Total		5																																																							
9" to 15"	---	$W \leq 0.05$	Ignore	Ignore																																																						
	$L \leq 10.0$	$0.05 < W \leq 0.10$	5																																																							
	---	$W > 0.10$	As round type																																																							
	Total		5																																																							
07	Polarizer Bubble	<table><tr><th rowspan="2">Dimension (diameter: Φ)</th><th colspan="2">Acceptance (Q'ty)</th></tr><tr><th>A area</th><th>B area</th></tr><tr><td>$\Phi \leq 0.25$</td><td>Ignore</td><td rowspan="4">Ignore</td></tr><tr><td>$0.25 < \Phi \leq 0.50$</td><td>4</td></tr><tr><td>$0.50 < \Phi \leq 0.80$</td><td>1</td></tr><tr><td>$\Phi > 0.80$</td><td>0</td></tr><tr><td>Total</td><td>5</td><td></td></tr></table>	Dimension (diameter: Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	4	$0.50 < \Phi \leq 0.80$	1	$\Phi > 0.80$	0	Total	5		Minor																																						
Dimension (diameter: Φ)	Acceptance (Q'ty)																																																									
	A area	B area																																																								
$\Phi \leq 0.25$	Ignore	Ignore																																																								
$0.25 < \Phi \leq 0.50$	4																																																									
$0.50 < \Phi \leq 0.80$	1																																																									
$\Phi > 0.80$	0																																																									
Total	5																																																									



◆ Specification For TFT-LCD Module 3.5" ~ 15" :

(Ver.B01)

NO	Item	Criterion	Level									
08	The crack of glass	Symbols : X: The length of crack Z: The thickness of crack t: The thickness of glass Y: The width of crack. W: terminal length a: LCD side length 8.1 General glass chip: 8.1.1 Chip on panel surface and crack between panels: <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$\leq a$</td><td>Crack can't enter viewing area</td><td>$\leq 1/2 t$</td></tr><tr><td>$\leq a$</td><td>Crack can't exceed the half of SP width.</td><td>$1/2 t < Z \leq t$</td></tr></table>	X	Y	Z	$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$	$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq t$	Minor
X	Y	Z										
$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$										
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq t$										



◆Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

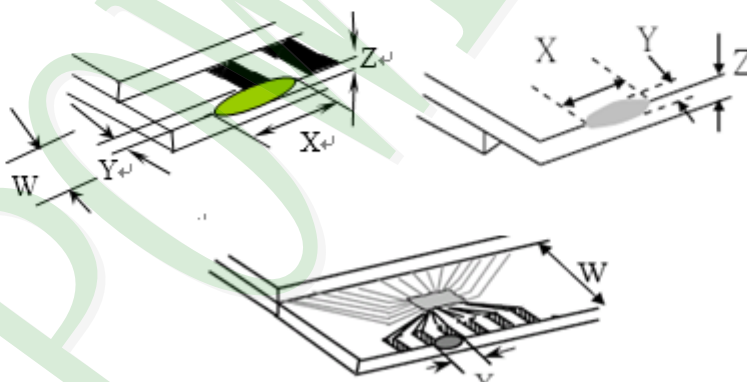NO	Item	Criterion	Level												
08	The crack of glass	Symbols : X: The length of crack Z: The thickness of crack t: The thickness of glass Y: The width of crack W: terminal length a: LCD side length 8.1.2 Corner crack: 	Minor												
		<table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$\leq 1/5 a$</td><td>Crack can't enter viewing area</td><td>$Z \leq 1/2 t$</td></tr><tr><td>$\leq 1/5 a$</td><td>Crack can't exceed the half of SP width.</td><td>$1/2 t < Z \leq 2 t$</td></tr></table>		X	Y	Z	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$			
X	Y	Z													
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$													
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$													
		8.2 Protrusion over terminal: 8.2.1 Chip on electrode pad: 													
		<table><tr><th></th><th>X</th><th>Y</th><th>Z</th></tr><tr><td>Front</td><td>$\leq a$</td><td>$\leq 1/2 W$</td><td>$\leq t$</td></tr><tr><td>Back</td><td>$\leq a$</td><td>$\leq W$</td><td>$\leq 1/2 t$</td></tr></table>		X	Y	Z	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	$\leq a$	$\leq W$	$\leq 1/2 t$	
	X	Y	Z												
Front	$\leq a$	$\leq 1/2 W$	$\leq t$												
Back	$\leq a$	$\leq W$	$\leq 1/2 t$												

◆ Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

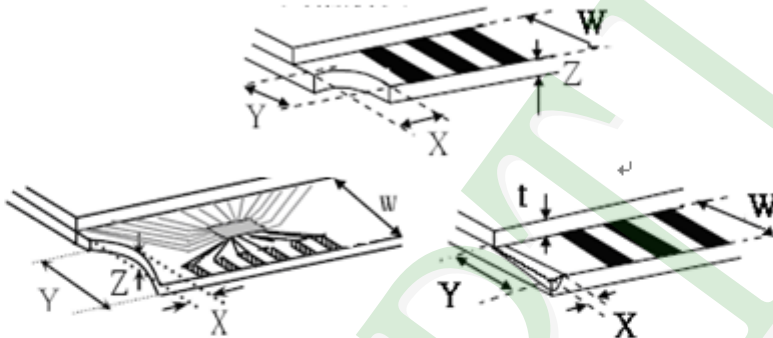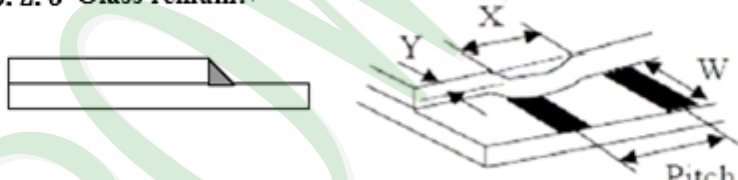NO	Item	Criterion	Level												
08	The crack of glass	Symbols: X: The length of crack Y: The width of crack Z: The thickness of crack t: The thickness of glass W: terminal length a: LCD side length 8.2.2 Non-conductive portion:  <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$\leq 1/3 a$</td><td>$\leq W$</td><td>$\leq t$</td></tr></table> ⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications. 8.2.3 Glass remain:  <table><tr><th>X</th><th>Y</th><th>Z</th></tr><tr><td>$\leq a$</td><td>$\leq 1/3 W$</td><td>$\leq t$</td></tr></table> 8.2.4 Cracking:  Not Allowed	X	Y	Z	$\leq 1/3 a$	$\leq W$	$\leq t$	X	Y	Z	$\leq a$	$\leq 1/3 W$	$\leq t$	Minor
X	Y	Z													
$\leq 1/3 a$	$\leq W$	$\leq t$													
X	Y	Z													
$\leq a$	$\leq 1/3 W$	$\leq t$													

◆Specification For TFT-LCD Module 3.5" ~15" :

(Ver.B01)

NO	Item	Criterion	Level
09	Backlight elements	9. 1 Backlight can't work normally.	Major
		9. 2 Backlight doesn't light or color is wrong.	Major
		9. 3 Illumination source flickers when lit.	Major
10	General appearance	10. 1 Pin type 、 quantity 、 dimension must match type in structure diagram.	Major
		10. 2 No short circuits in components on PCB or FPC.	Major
		10. 3 Parts on PCB or FPC must be: no wrong parts, missing parts or excess parts.	Major
		10. 4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10. 5 The folding and peeled off in polarizer are not acceptable.	Minor
		10. 6 The PCB or FPC between B/L assembled distance(PCB or FPC) is ≤ 1.5 mm.	Minor

4. RELIABILITY TEST

4.1 Reliability Test Condition

(Ver.B01)

NO.	TEST ITEM	TEST CONDITION											
1	High Temperature Storage Test	Keep in +80 ±5℃ 240 hrs											
2	Low Temperature Storage Test	Keep in -30 ±5℃ 240 hrs											
3	High Temperature / High Humidity Storage Test	Keep in +60 ℃ / 90% R.H duration for 240 hrs (Excluding the polarizer)											
4	Temperature Cycling Storage Test	-30℃ → +25℃ → +80℃ → +25℃ (30mins) (5mins) (30mins) (5mins) ← 20 Cycle →											
5	ESD Test	Air Discharge: Apply 2 KV with 5 times Discharge for each polarity +/-	Contact Discharge: Apply 250 V with 5 times discharge for each polarity +/-										
		1.Temperature ambience : 15℃ ~35℃ 2.Humidity relative : 30% ~60% 3.Energy Storage Capacitance(Cs+Cd) : 150pF±10% 4.Discharge Resistance(Rd) : 330Ω±10% 5.Discharge, mode of operation : Single Discharge (time between successive discharges at least 1 sec) (Tolerance if the output voltage indication : ±5%)											
6	Vibration Test (Packaged)	1.Sine wave 10~55 Hz frequency (1 min/sweep) 2.The amplitude of vibration :1.5 mm 3.Each direction (X、Y、Z) duration for 2 Hrs											
7	Drop Test (Packaged)	<table><tr><th>Packing Weight (Kg)</th><th>Drop Height (cm)</th></tr><tr><td>0 ~ 45.4</td><td>122</td></tr><tr><td>45.4 ~ 90.8</td><td>76</td></tr><tr><td>90.8 ~ 454</td><td>61</td></tr><tr><td>Over 454</td><td>46</td></tr></table>		Packing Weight (Kg)	Drop Height (cm)	0 ~ 45.4	122	45.4 ~ 90.8	76	90.8 ~ 454	61	Over 454	46
		Packing Weight (Kg)	Drop Height (cm)										
0 ~ 45.4	122												
45.4 ~ 90.8	76												
90.8 ~ 454	61												
Over 454	46												
		Drop Direction :※1 corner / 3 edges / 6 sides each 1time											

◎Result Evaluation Criteria :

Under the display quality test conditions with normal operations with normal operation state. Do not change these conditions as such changes may affect practical display function.

(Normal operation state)

Temperature: $+20 \sim 30^{\circ}\text{C}$

Humidity: $50 \sim 70\%$

Atmospheric pressure: $86 \sim 106\text{Kpa}$

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module, be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So, please handle it very carefully, do not touch, push or rub the exposed polarizing with anything harder than an HB pencil lead (glass, tweezers, etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands, this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM
- 5.2.10 Caution!(LCM products with Capacitive Touch Panel)
Strong EMI-sources such as switch-mode power supplies (SMPS) can lead to touch malfunction (e.g. ghost-touches).
Therefore, the touch needs to be thoroughly tested inside the target application.
- 5.2.11 Do not let the LCD screen display static images (text, logos or pictures) for a prolonged period of time to prevent possible image burn-in.

5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush, shake, or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment, fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

Ver.001	LCM包裝規格書		Approve	Check	Contact
Documents NO.	PKG-PH800480T007-IHA	LCM Packaging Specifications (For Tray)	Oliver	Oliver	Stone


1.包裝材料規格表 (Packaging Material) : (per carton)

No.	Item	Model	Dimensions (mm)	1Pcs Weight	Quantity	Total Weight
1	成品 (LCM)	PH800480T007-IHA	165.0 X 104.44	0.147	60	8.82
2	靜電袋(1)Antistatic Bag	BAG240170ARABA	240 X 170	0.0048	60	0.288
3	上蓋(2)EPE(Cover)	FOAM0000000078	310 X 250 X 90	0.1	4	0.4
4	下座(3)EPE(Bottom)	FOAM0000000079	310 X 250 X 100	0.17	4	0.68
5	海綿墊(4)Foam Rubber Cushion	OTFOAM00006ABA	290 X 240 X 10	0.0058	8	0.0464
6	外紙箱(5)Carton	BX52732536CCBA	527 X 325 X 360	1.092	1	1.092
7						
8						
9						

2.一整箱總重量 (Total LCD Weight in carton) : 11.33 Kg±10%

3.單箱數量規格表 (Packaging Specifications and Quantity) :

(1)Total LCD quantity in carton : quantity per box 15 x no of boxes 4 = 60

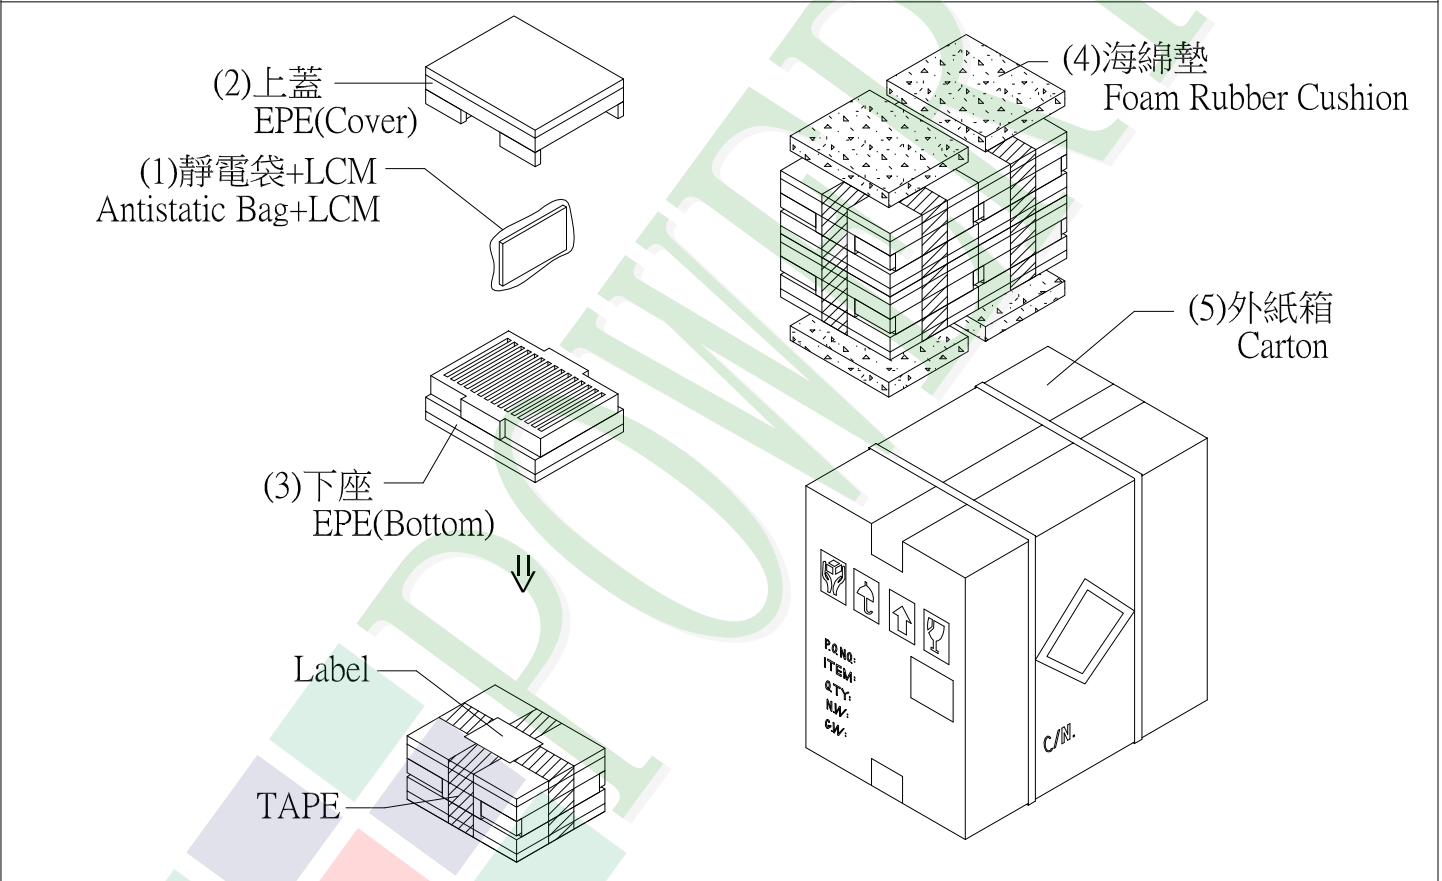

特 記 事 項 (REMARK)

4. Label Specifications :

TYPE			
ID.NO		S/O	
Q'TY	Pcs	Date	
Lot.NO			
Note			

參照"成品包裝點檢作業標準書"內容

5. 包裝數量不足時需以EPE(舒美墊)填補空槽
EPE:OTFOAMEP0003BA自裁成
(166.5X109.0X10mm)