

EXAMINED BY : Justin Horng	EMERGING DISPLAY TECHNOLOGIES CORPORATION	FILE NO . CAS-0007932
APPROVED BY: Yung Chang Hu		ISSUE : JUN.02, 2015
		TOTAL PAGE : 30
		VERSION : 2

CUSTOMER	ACCEPTANCE	SPECIFICATIONS
----------	------------	----------------

MODEL NO. :

ET 0 4 3 0 0 5 D K 6

(GP)

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE : _____

BY : _____

RECORDS OF REVISION

DOC . FIRST ISSUE

JUN.17, 2014

DATE

REVISED
PAGE
NO.

SUMMARY

JUN.02, 2015

2

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

1. LED BACKLIGHT POWER DISSIPATION: MAX.=(5184)→4896
2. LED BACKLIGHT FORWARD CURRENT: MAX.=(240)→240

3

4. ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
POWER SUPPLY FOR LED BACKLIGHT	VF	IF = (70mA)	—	(19.5)	—	V	NOTE (2)
LED LIFE TIME	—	ILED=(70mA) (PER LED)	70K	—	—	HRS	NOTE (3) NOTE (4)

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
POWER SUPPLY FOR LED BACKLIGHT	VF	IF = 60mA	16	—	20.4	V	NOTE (2)
LED LIFE TIME	—	ILED=60mA (PER LED)	70K	—	—	HRS	NOTE (3) NOTE (4)

7


6.1 OPTICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
THE BRIGHTNESS OF MODULE	B	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = (70mA)	(470)	—	—	cd/m ²	(5)
COLOR OF CIE COORDINATE	WHITE	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = 60mA NTSC : 50%	(0.255)	(0.315)	(0.375)	—	(6)
	Wx		(0.29)	(0.35)	(0.41)		
	Wy		(0.54)	(0.59)	(0.64)		
	Rx		(0.29)	(0.34)	(0.39)		
	Ry		(0.28)	(0.33)	(0.38)		
	Gx		(0.54)	(0.59)	(0.64)		
	Gy		(0.095)	(0.145)	(0.195)		
	Bx		(0.065)	(0.11)	(0.165)		
THE BRIGHTNESS OF UNIFORMITY	—	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = (70mA)	70	75	—	%	(5)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
THE BRIGHTNESS OF MODULE	B	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = 60mA	470	620	—	cd/m ²	(5)
COLOR OF CIE COORDINATE	WHITE	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = 60mA NTSC : 56%	0.26	0.32	0.38	—	(6)
	Wx		0.32	0.38	0.44		
	Wy		0.56	0.61	0.66		
	Rx		0.31	0.36	0.41		
	Ry		0.28	0.33	0.38		
	Gx		0.58	0.63	0.68		
	Gy		0.1	0.15	0.2		
	Bx		0.12	0.17	0.22		
THE BRIGHTNESS OF UNIFORMITY	—	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = 60mA	70	75	—	%	(5)

8

6.2 THE BRIGHTNESS TEST METHOD

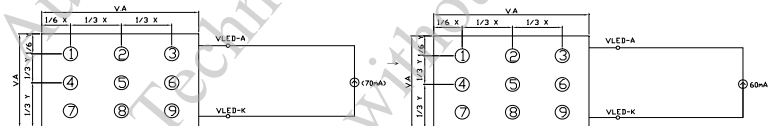

14

11.1 POWER SUPPLY FOR LCM

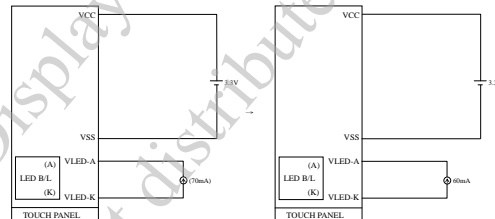


TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	TIMING CHART -----	4 ~ 6
6.	OPTICAL CHARACTERISTICS -----	7, 8
7.	OUTLINE DIMENSIONS -----	9
8.	BLOCK DIAGRAM -----	10
9.	DETAIL DRAWING OF DOT MATRIX -----	11
10.	INTERFACE SIGNALS -----	12, 13
11.	POWER SUPPLY -----	14
12.	TOUCH PANEL SPECIFICATION -----	15 ~ 20
13.	INSPECTION CRITERION -----	21 ~ 30

1. GENERAL SPECIFICATIONS

1.1 DATA SHEETS FOR CONTROLLER/DRIVER

PLEASE REFER TO :

HIMAX HX8257-A

1.2 MATERIAL SAFETY DESCRIPTION

ASSEMBLIES SHALL COMPLY WITH EDT GREEN PRODUCT (GP) REQUIREMENTS, INCLUDING PROHIBITED MATERIALS/COMPONENTS CONTAINING LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS (PBB), POLYBROMINATED DIPHENYL ETHERS (PBDE), POLYCHLORINATED BIPHENYLS (PCB) CATEGORY, POLYCHLORINATED NAPHTHALENE (PCN) CATEGORY, POLYCHLORINATED TERPHENYLS (PCT) CATEGORY, CHLORINATED PARAFFINS (CP) CATEGORY, TRIBUTHYL TIN CATEGORY / TRIPHENYL TIN CATEGORY, ASBESTOS, SPECIFIC AZO COMPOUNDS, FORMALDEHYDE, POLYVINYL CHLORIDE (PVC) AND PVC BLENDS, OTHER BROMINATED ORGANIC COMPOUNDS AND OTHER CHLORINATED ORGANIC COMPOUNDS.

2. MECHANICAL SPECIFICATIONS

- (1) DIAGONALS ----- 4.3 inch
- (2) NUMBER OF DOTS ----- 480W * (RGB) * 272H DOTS
- (3) MODULE SIZE ----- 105.5W * 67.2H * 6.85D mm
(WITHOUT FPC)
- (4) EFFECTIVE AREA ----- 98.7W * 56.4H mm
- (5) ACTIVE AREA ----- 95.04W * 53.856H mm (LCD)
97W * 55.8H mm (T/P)
- (6) DOT SIZE ----- 0.066W * 0.198H mm
- (7) PIXEL PITCH ----- 0.198W * 0.198H mm
- (8) LCD TYPE ----- TFT , TRANSMISSIVE
- (9) COLOR ----- 16.7M
- (10) VIEWING DIRECTION ----- 6 O'CLOCK
- (11) BACK LIGHT ----- LED , COLOR : WHITE
- (12) INTERFACE MODE ----- RGB(24 BIT) PARALLEL

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	REMARK
POWER VOLTAGE	VCC-VSS	-0.3	4.0	V	VSS=0
LED BACKLIGHT POWER DISSIPATION	PD	—	4896	mW	
LED BACKLIGHT FORWARD CURRENT	IF	—	240	mA	

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATING		STORAGE		REMARK
	MIN.	MAX.	MIN.	MAX.	
AMBIENT TEMPERATURE	-20°C	70°C	-30°C	80°C	NOTE (1), (2)
HUMIDITY	NOTE (3)		NOTE (3)		WITHOUT CONDENSATION
VIBRATION	—	3.92 m/s ² (0.4 G)	—	19.6 m/s ² (2.0 G)	10~55Hz X, Y, Z, EACH 2HRS
SHOCK	—	58.8 m/s ² (6 G)	—	980 m/s ² (100 G)	6 ms XYZ DIRECTIONS 3 TIMES EACH
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (1) : Ta AT -30°C : 48HRS MAX .

80°C : 48HRS MAX .

NOTE (2) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE .

NOTE (3) : Ta ≤ 60°C : 90%RH MAX (96HRS MAX).

Ta > 60°C : ABSOLUTE HUMIDITY MUST BE LOWER THAN THE HUMIDITY
OF 90%RH AT 60°C (96HRS MAX).

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARK
POWER SUPPLY	VCC-VSS	—	3.0	3.3	3.6	V	
OPERATING CURRENT	ICC	—	—	17	22	mA	
INPUT LOW VOLTAGE	V _{IL}	—	0	—	0.2*VCC	V	NOTE (1)
INPUT HIGH VOLTAGE	V _{IH}	—	0.8*VCC	—	VCC	V	NOTE (1)
OUTPUT LOW VOLTAGE	V _{OL}	I _{OUT} = 100μA	0	—	0.1*VCC	V	
OUTPUT HIGH VOLTAGE	V _{OH}	I _{OUT} = -100μA	0.9*VCC	—	VCC	V	
POWER SUPPLY FOR LED BACKLIGHT	VF	IF = 60mA	16	—	20.4	V	NOTE (2)
LED LIFE TIME	—	I _{LED} = 60mA (PER LED)	70K	—	—	HRS	NOTE (3) NOTE (4)

NOTE (1) : APPLIED TO TERMINALS R0~R7, G0~G7, B0~B7, CLK, DISP, HS, VS.

NOTE (2) : INTERNAL CIRCUIT DIAGRAM OF BACKLIGHT




NOTE (3) : CONDITIONS; TA=25 °C, CONTINUOUS LIGHTING

NOTE (4) : DEFINITIONS OF FAILURE

A. LCD LUMINANCE BECOMES HALF OF THE MINIMUM VALUE

B. LED DOESN'T LIGHT NORMALLY

NOTE (5) : AMBIENT TEMP. VS. ALLOWABLE FORWARD CURRENT. (PER LED)

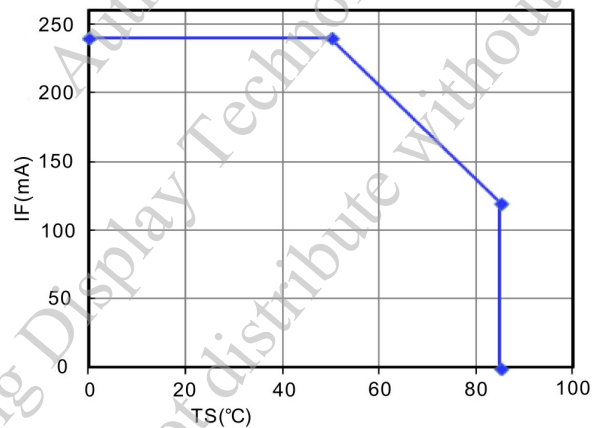

5. TIMING CHART

THE HX8257-A BOTH SUPPORTS DE MODE AND SYNC MODE TIMING. THE MODE WAS DECIDED BY DE SIGNAL INTERNALLY. WHEN DE IS PULLED LOW, THE HX8257-A USES HS+VS FOR TIMING CONTROL AND THIS TIMING MODE IS SYNC MODE. WHEN DE IS PULLED HIGH FOR ACTIVE DATA AND PULLED LOW FOR BLANKING DATA, THE HX8257-A USES DE FOR TIMING CONTROL AND THIS TIMING MODE IS DE MODE. THE DETAIL TIMING CHART SHOWED BELOW.


5.1 PARALLEL RGB INPUT TIMING REQUIREMENT

480RGB×272, $T_A=25^{\circ}\text{C}$, $V_{CC}=3.0\text{V}$ to 3.6V , $V_{SS}=0\text{V}$

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
CLOCK CYCLE	$f_{\text{CLK}}^{(1)}$	—	9	15	MHz
HSYNC CYCLE	$1/t_h$	—	17.14	—	KHz
VSYSN CYCLE	$1/t_v$	—	59.94	—	Hz
HORIZONTAL SIGNAL					
HORIZONTAL CYCLE	t_h	525	525	605	CLK
HORIZONTAL DISPLAY PERIOD	t_{hd}	480	480	480	CLK
HORIZONTAL FRONT PORCH	t_{hf}	2	2	82	CLK
HORIZONTAL PULSE WIDTH	$t_{hp}^{(2)}$	2	41	41	CLK
HORIZONTAL BACK PORCH	$t_{hb}^{(2)}$	2	2	41	CLK
VERTICAL SIGNAL					
VERTICAL CYCLE	t_v	285	286	399	$H^{(1)}$
VERTICAL DISPLAY PERIOD	t_{vd}	272	272	272	$H^{(1)}$
VERTICAL FRONT PORCH	t_{vf}	1	2	227	$H^{(1)}$
VERTICAL PULSE WIDTH	$t_{vp}^{(2)}$	1	10	11	$H^{(1)}$
VERTICAL BACK PORCH	$t_{vb}^{(2)}$	1	2	11	$H^{(1)}$

NOTE : 1.Unit: $\text{CLK}=1/f_{\text{CLK}}$, $H=t_h$,

2. It is necessary to keep $t_{vp}+t_{vb}=12$ and $t_{hp}+t_{hb}=43$ in sync mode. DE mode is unnecessary to keep it.

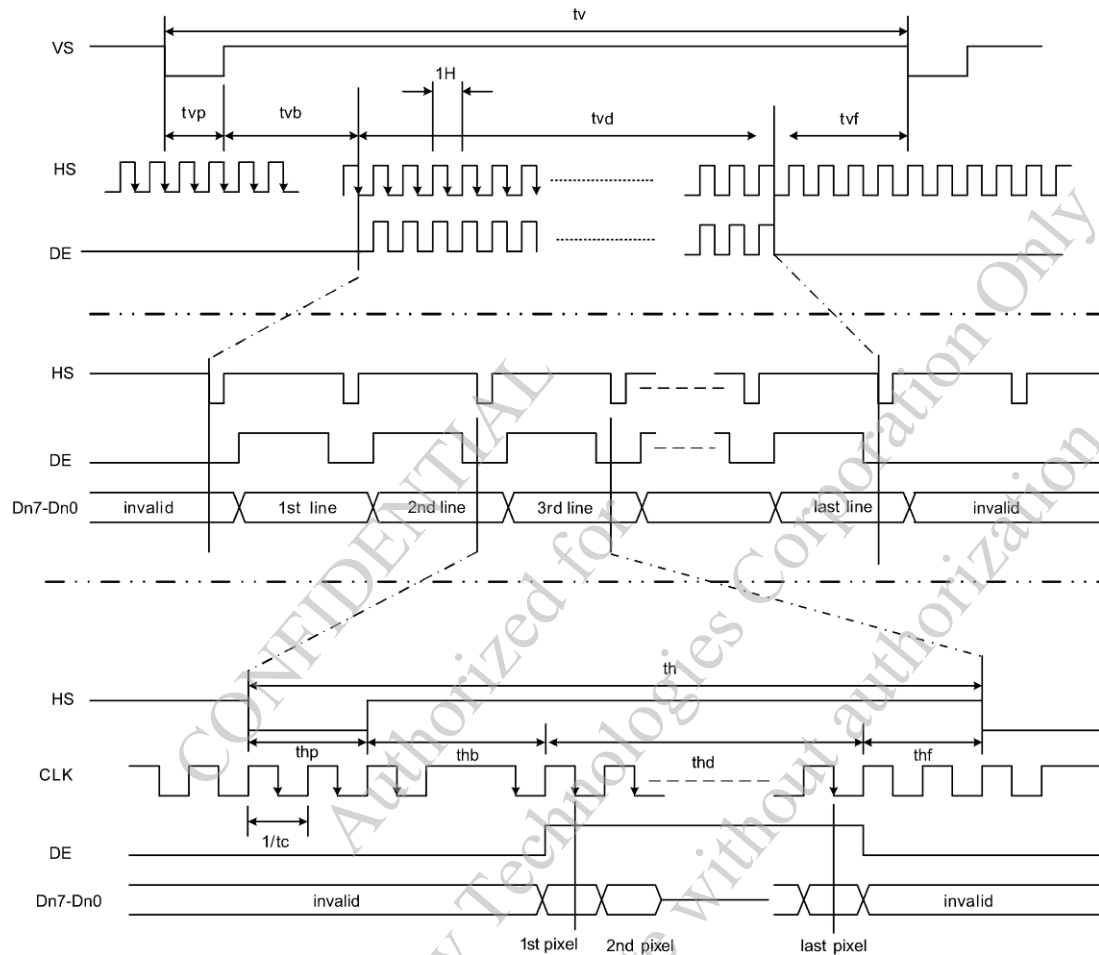


5.2 INPUT SETUP TIMING REQUIREMENT

$T_A=25^{\circ}\text{C}$, $V_{CC}=3.0\text{V}$ to 3.6V , $V_{SS}=0\text{V}$, $t_r^{(1)} = t_f^{(1)} = 2\text{ns}$

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
DISP SETUP TIME	t_{diss}	10	—	—	ns
DISP HOLD TIME	t_{dish}	10	—	—	ns
CLOCK PERIOD	$PW_{CLK}^{(2)}$	66.7	—	—	ns
CLOCK PULSE HIGH PERIOD	$PWH^{(2)}$	26.7	—	—	ns
CLOCK PULSE LOW PERIOD	$PWL^{(2)}$	26.7	—	—	ns
HSYNC SETUP TIME	t_{hs}	10	—	—	ns
HSYNC HOLD TIME	t_{hh}	10	—	—	ns
DATA SETUP TIME	t_{ds}	10	—	—	ns
DATA HOLD TIME	t_{dh}	10	—	—	ns
DE SETUP TIME	t_{des}	10	—	—	ns
DE HOLD TIME	t_{deh}	10	—	—	ns
VSYNC SETUP TIME	t_{vhs}	10	—	—	ns
VSYNC HOLD TIME	t_{vhh}	10	—	—	ns

NOTE : 1. T_R , T_F IS DEFINED 10% TO 90% OF SIGNAL AMPLITUDE.

2. FOR PARALLEL INTERFACE, MAXIMUM CLOCK FREQUENCY IS 15MHZ.

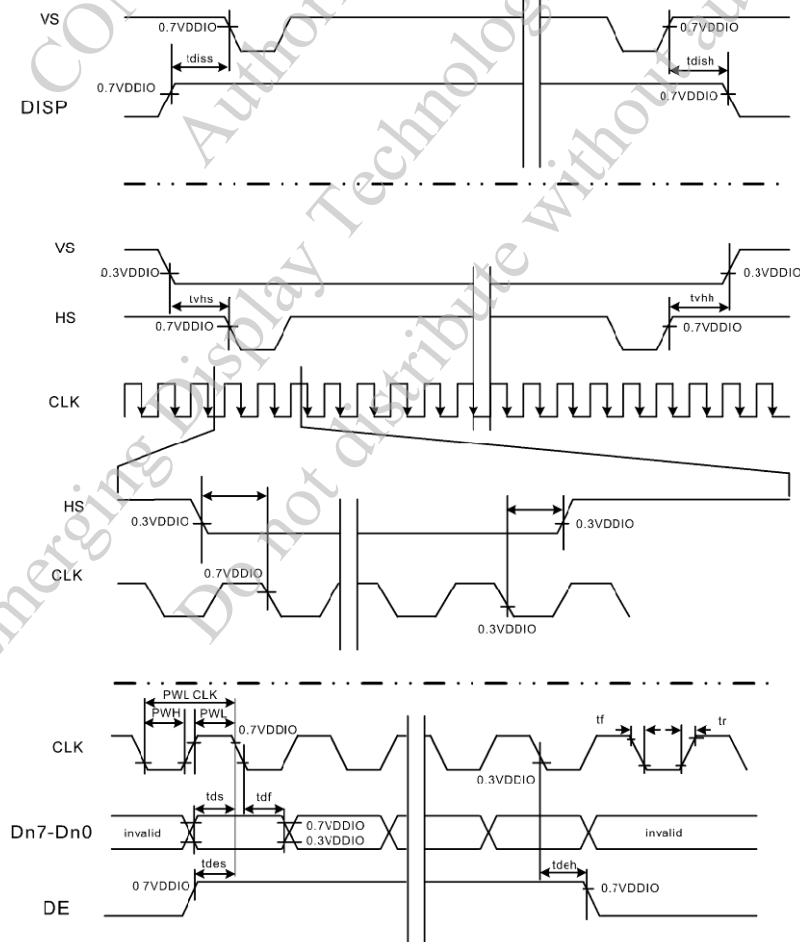

6. OPTICAL CHARACTERISTICS (NOTE 1)


6.1 OPTICAL CHARACTERISTICS

Ta = 25°C


ITEM		SYMBOL	CONDITION		MIN.	TYP.	MAX.	UNIT	REMARK
VIEWING ANGLE		θ_{y+}	CR ≥ 10	$\theta_x=0^\circ$	50	55	—	deg.	(2) (3)
		θ_{y-}			70	75	—		
		θ_{x+}		$\theta_y=0^\circ$	70	75	—		
		θ_{x-}			70	75	—		
CONTRAST RATIO		CR	$\theta_x=0^\circ$, $\theta_y=0^\circ$		300	400	—	—	(3)
RESPONSE TIME		t r (rise)	$\theta_x=0^\circ$, $\theta_y=0^\circ$		—	5	—	msec	(4)
		t f (fall)			—	15	—		
THE BRIGHTNESS OF MODULE		B	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF = 60mA		470	620		cd/m ²	(5)
COLOR OF CIE COORDINATE	WHITE	W _x	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF =60mA NTSC : 56%		0.26	0.32	0.38	—	(6)
		W _y			0.32	0.38	0.44		
	RED	R _x			0.56	0.61	0.66	—	
		R _y			0.31	0.36	0.41		
	GREEN	G _x			0.28	0.33	0.38	—	
		G _y			0.58	0.63	0.68		
	BLUE	B _x			0.1	0.15	0.2	—	
		B _y			0.12	0.17	0.22		
THE BRIGHTNESS OF UNIFORMITY		—	$\theta_x=0^\circ$, $\theta_y=0^\circ$ IF =60mA		70	75	—	%	(5)

NOTE (1) : TEST EQUIPMENT SETUP :

AFTER STABILIZING AND LEAVING THE PANEL ALONE AT A GIVEN TEMPERATURE FOR 30 MINUTES. MEASUREMENT SHOULD BE EXECUTED IN A STABLE, WINDLESS, AND DARK ROOM. OPTICAL SPECIFICATIONS ARE MEASURED BY TOPCON BM-7 (FAST) WITH A VIEWING ANGLE OF 1° AT A DISTANCE OF 50cm AND NORMAL DIRECTION.

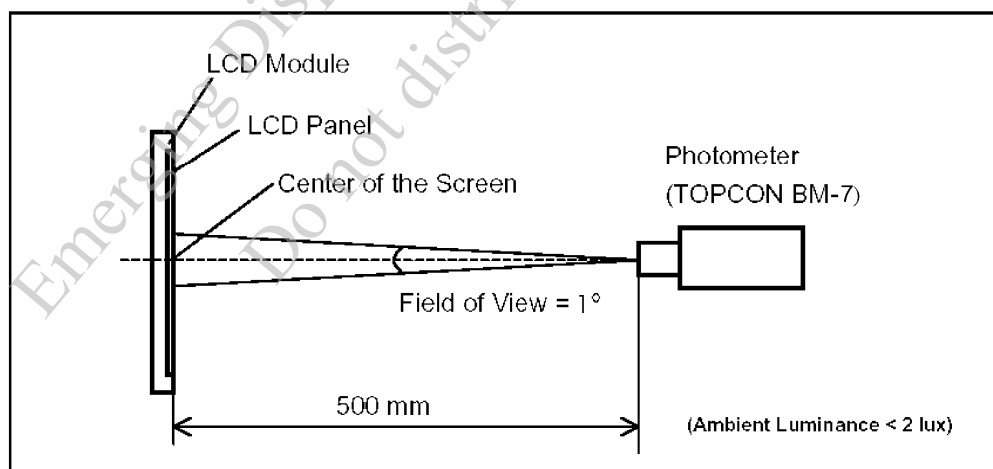

NOTE (2) : DEFINITION OF VIEWING ANGLE :

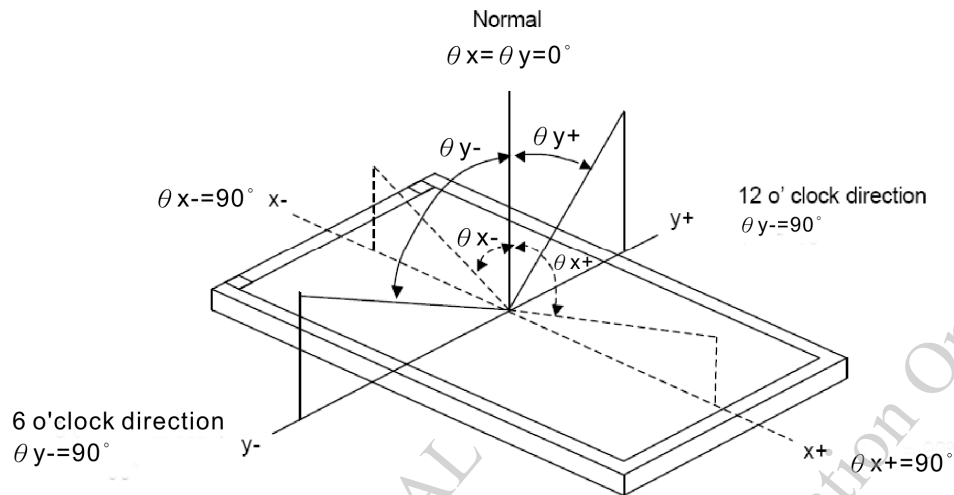


NOTE (3) : DEFINITION OF CONTRAST RATIO :

$$\text{CONTRAST RATIO(CR)} = \frac{\text{BRIGHTNESS MEASURED WHEN LCD IS AT "WHITE STATE"}}{\text{BRIGHTNESS MEASURED WHEN LCD IS AT "BLACK STATE"}}$$

NOTE (4) : DEFINITION OF RESPONSE TIME : TR AND TF


THE FIGURE BELOW IS THE OUTPUT SIGNAL OF THE PHOTO DETECTOR.

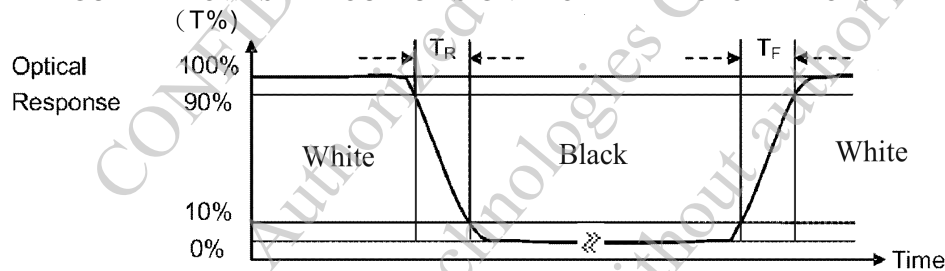

NOTE (5) : BRIGHTNESS MEASURED WHEN LCD IS AT " WHITE STATE "

NOTE (6) : THE 100% TRANSMISSION IS DEFINED AS THE TRANSMISSION OF LCD PANEL WHEN ALL THE INPUT TERMINALS OF MODULE ARE ELECTRICALLY OPENED.

6.2 THE BRIGHTNESS TEST METHOD

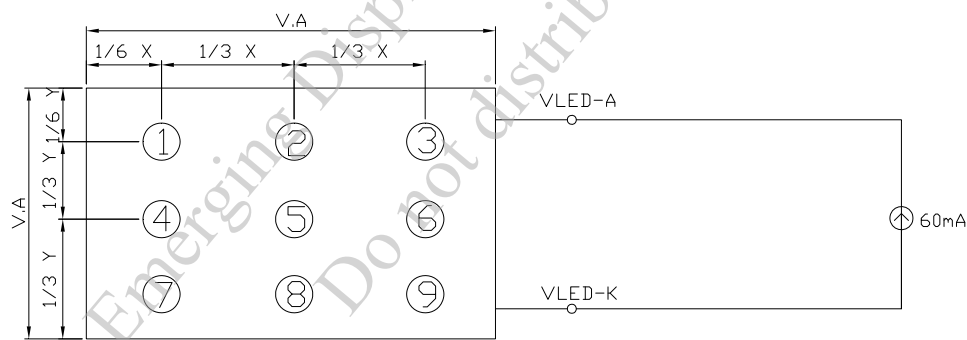


UNIT : mm

6.3 THE BRIGHTNESS UNIFORMITY CALCULATE METHOD


$$\text{UNIFORMITY} = \left[1 - \frac{\text{MAXIMUM BRIGHTNESS} - \text{MINIMUM BRIGHTNESS}}{\text{AVERAGE BRIGHTNESS}} \right] \times 100\%$$

7. OUTLINE DIMENSIONS

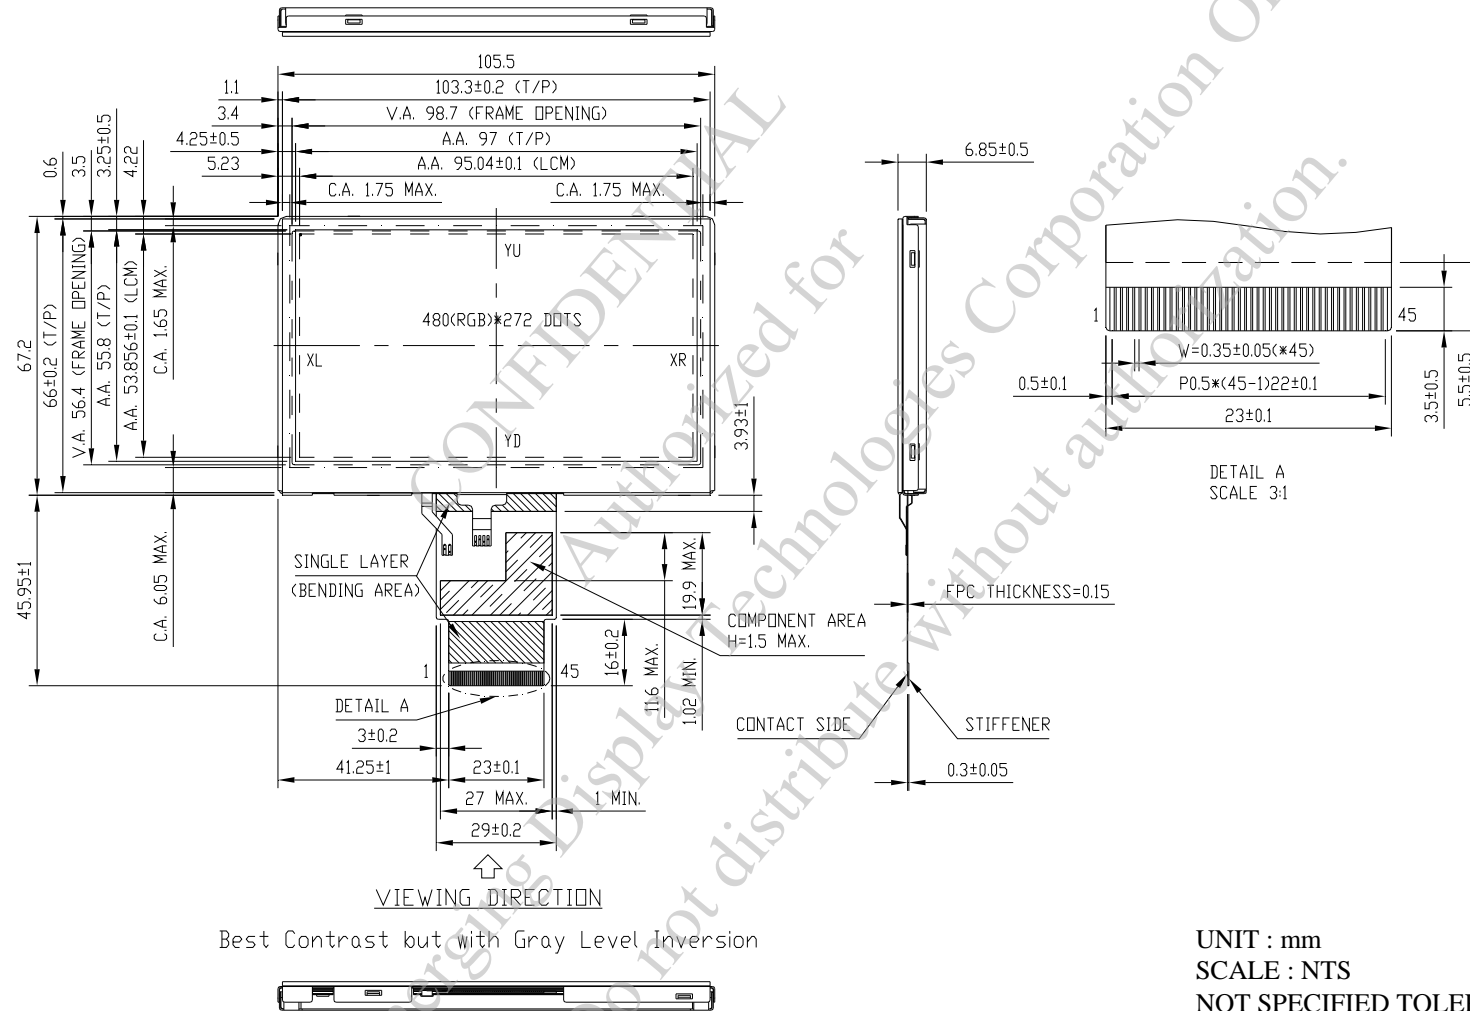


UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ±0.3mm

8. BLOCK DIAGRAM

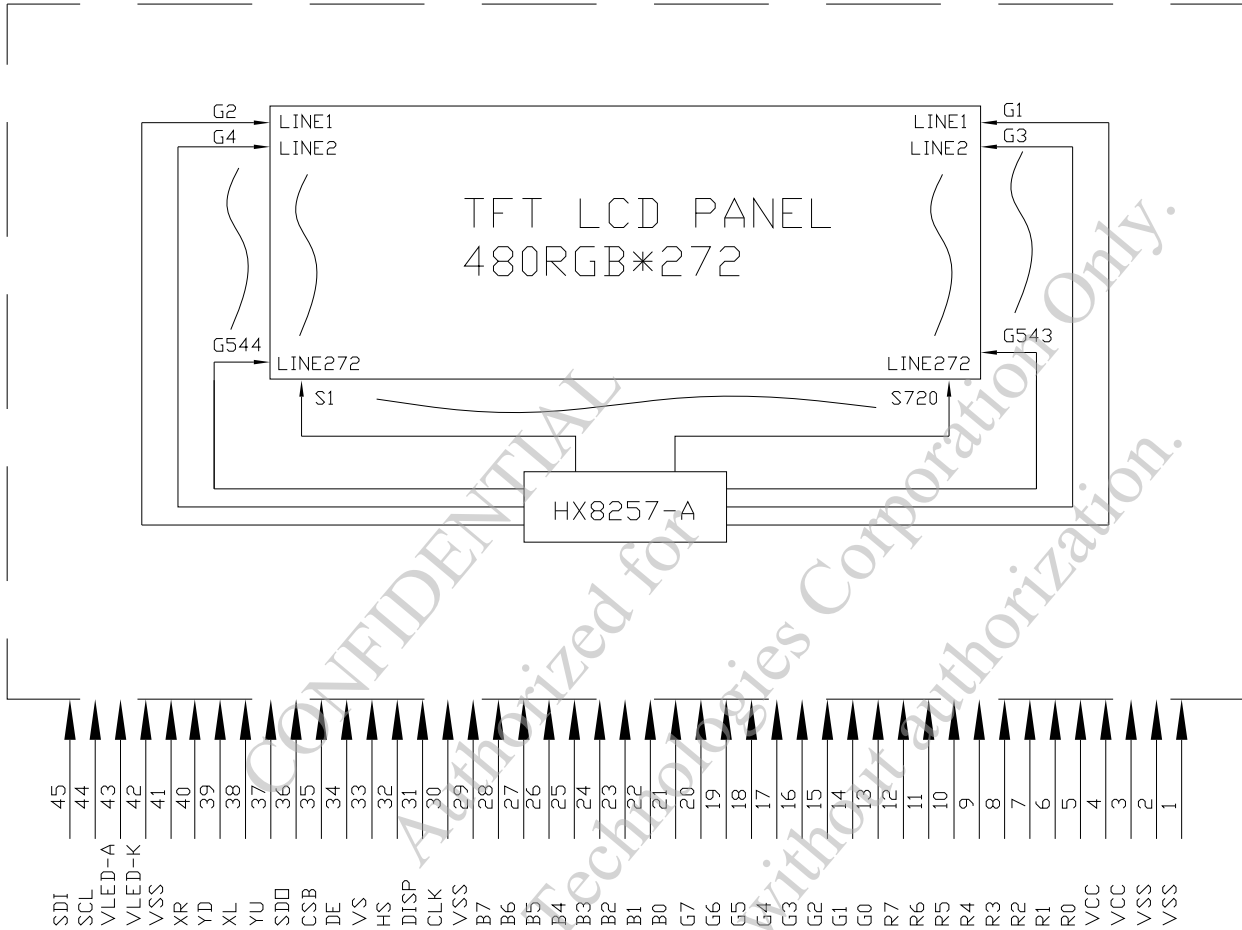

9. DETAIL DRAWING OF DOT MATRIX

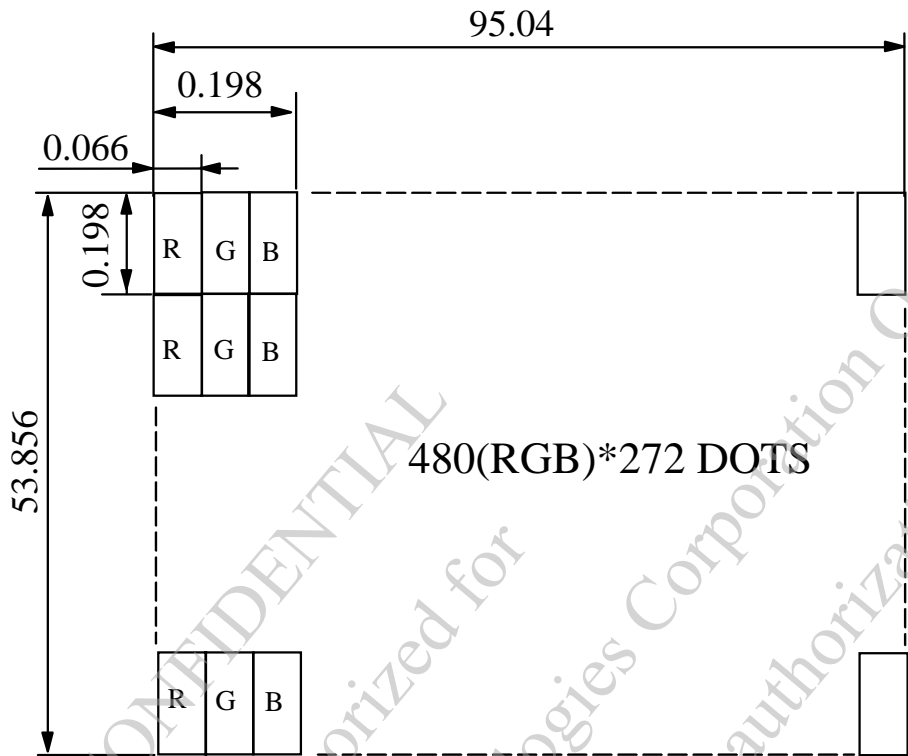

UNIT : mm
SCALE : NTS
NOT SPECIFIED TOLERANCE IS ± 0.1
DOTS MATRIX TOLERANCE IS ± 0.01

10. INTERFACE SIGNALS


10.1 LCM INTERFACE

PIN NO.	SYMBOL	FUNCTION
1	VSS	GROUND
2	VSS	GROUND
3	VCC	+3.3V POWER SOURCE
4	VCC	+3.3V POWER SOURCE
5	R0	RED DATA SIGNAL (LSB)
6	R1	RED DATA SIGNAL
7	R2	RED DATA SIGNAL
8	R3	RED DATA SIGNAL
9	R4	RED DATA SIGNAL
10	R5	RED DATA SIGNAL
11	R6	RED DATA SIGNAL
12	R7	RED DATA SIGNAL (MSB)
13	G0	GREEN DATA SIGNAL (LSB)
14	G1	GREEN DATA SIGNAL
15	G2	GREEN DATA SIGNAL
16	G3	GREEN DATA SIGNAL
17	G4	GREEN DATA SIGNAL
18	G5	GREEN DATA SIGNAL
19	G6	GREEN DATA SIGNAL
20	G7	GREEN DATA SIGNAL (MSB)
21	B0	BLUE DATA SIGNAL (LSB)
22	B1	BLUE DATA SIGNAL
23	B2	BLUE DATA SIGNAL
24	B3	BLUE DATA SIGNAL
25	B4	BLUE DATA SIGNAL
26	B5	BLUE DATA SIGNAL
27	B6	BLUE DATA SIGNAL
28	B7	BLUE DATA SIGNAL (MSB)
29	VSS	GROUND
30	CLK	CLOCK SIGNAL FOR DATA LATCHING AND INTERNAL COUNTER OF THE TIMING CONTROLLER.
31	DISP	DISPLAY ON/OFF MODE CONTROL. INTERNALLY PULLED HIGH. (a) DISP=L, STANDBY MODE. (b) DISP=H, NORMAL DISPLAY MODE.


PIN NO.	SYMBOL	FUNCTION	
32	HS	HORIZONTAL SYNC INPUT WITH NEGATIVE POLARITY. INTERNALLY PULL HIGH.	
33	VS	VERTICAL SYNC INPUT WITH NEGATIVE POLARITY. INTERNALLY PULL HIGH.	
34	DE	INPUT DATA ENABLE CONTROL. INTERNALLY PULLED LOW.	
35	CSB	CHIP SELECT PIN OF SERIAL INTERFACE. INTERNAL PULL HIGH. - LEAVE IT OPEN WHEN NOT USED	
36	SDO	DATA OUTPUT PIN IN SERIAL MODE -LEAVE IT OPEN WHEN NOT USED	
37	YU	TOP PANEL	TOUCH PANEL
38	XL	LEFT PANEL	
39	YD	BOTTOM PANEL	
40	XR	RIGHT PANEL	
41	VSS	GROUND	
42	VLED-K	LED POWER SOURCE INPUT TERMINAL (CATHODE SIDE)	
43	VLED-A	LED POWER SOURCE INPUT TERMINAL (ANODE SIDE)	
44	SCL	DATA INPUT PIN IN SERIAL MODE. INTERNAL PULL HIGH. -LEAVE IT OPEN WHEN NOT USED	
45	SDI	DATA INPUT PIN IN SERIAL MODE -LEAVE IT OPEN WHEN NOT USED	

11. POWER SUPPLY


11.1 POWER SUPPLY FOR LCM

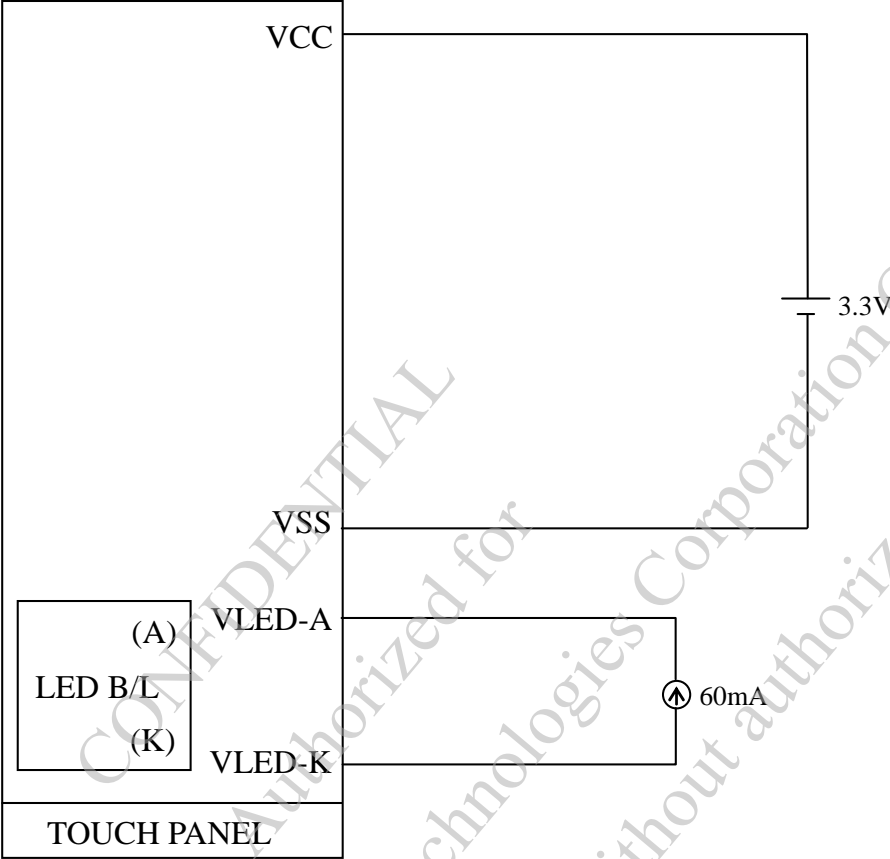

11.2 POWER ON SEQUENCE

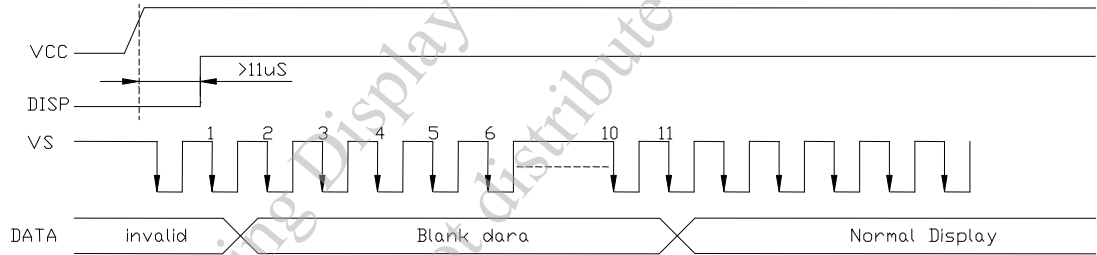

11.3 POWER OFF SEQUENCE

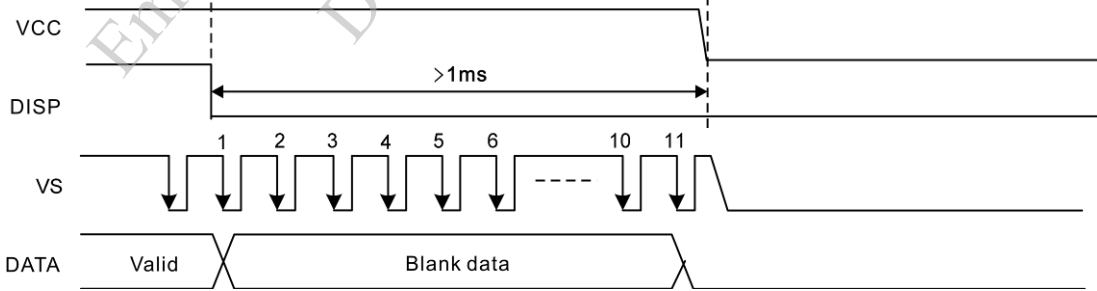

12. TOUCH PANEL SPECIFICATION

12.1 ELECTRICAL CHARACTERISTICS

Ta = 25°C

ITEM	CONDITION	SPEC.	UNIT
LINEARITY	—	± 1.5	%
TERMINAL RESISTANCE	X AXIS	260 ~ 1240	Ω
	Y AXIS	160 ~ 640	
INSULATION RESISTANCE	DC25V	≥ 20	MΩ
INPUT VOLTAGE	—	5(TYP)	V

12.2 PRECAUTIONS IN USE OF TOUCH PANEL


12.2.1 PURPOSE :

IN ORDER TO PREVENT ACCIDENTAL USE AND PERFORMANCE DETERIORATION, PLEASE KEEP THE FOLLOWING PRECAUTIONS AND INHIBITED POINTS.

12.2.2 ITEM AND ILLUSTRATION :

(1)STRUCTURE, AREA DEFINITION

THE STRUCTURE AND THE PERFORMANCE GUARANTEED AREA OF THIS TOUCH PANEL ARE DEFINED BELOW :

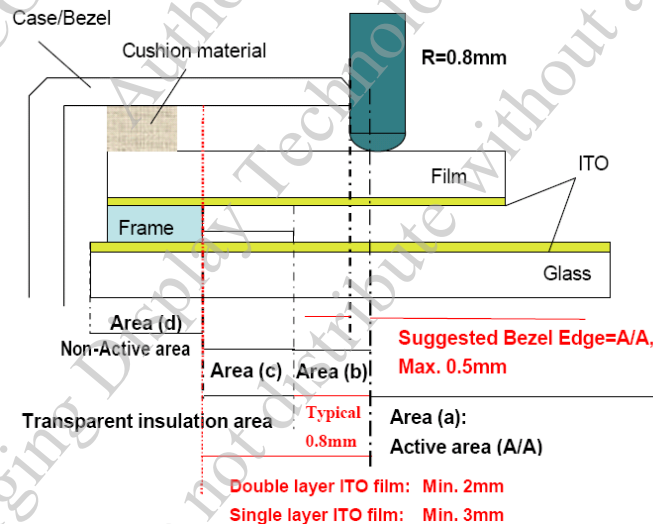

THE ABOVE FIGURE IS OUR DESIGN RULE OF TOUCH PANEL.

IF IT CANNOT MEET YOUR REQUIREMENT, PLEASE CONTACT WITH OUR ENGINEERS FOR FURTHER DISCUSSION.

ABOVE FIGURE ILLUSTRATES THE RECOMMENDED BEZEL AND CUSHION DESIGN. IN ORDER TO PREVENT UNUSUAL PERFORMANCE DEGRADATION AND MALFUNCTION OF A TOUCH PANEL, PLEASE CARRY OUT THE SET CASE DESIGNING AND A TOUCH PANEL ASSEMBLING METHOD AFTER SURELY CONSIDERING THE DEFINITION OF EACH AREA ILLUSTRATED IN ABOVE FIGURE.

AREA(a) : ACTIVE AREA

THE ACTIVE AREA IS GUARANTEED THE POSITION DATA DETECTABLE PRECISION, OPERATION FORCE AND OTHER OPERATIONS. IT IS STRONGLY RECOMMENDED TO PLACE THE OPERATION BUTTON OR MENU KEYS WITHIN THE ACTIVE AREA. DUE TO STRUCTURE, THE ACTIVE AREA IS LESS DURABLE AT THE EDGE OR CLOSE TO THE EDGE.

AREA(b) : OPERATION NON-GUARANTEED AREA

THIS AREA DOES NOT GUARANTEE A TOUCH PANEL OPERATION AND IT'S FUNCTION. WHEN THIS AREA IS PRESSED, TOUCH PANEL SHOWS DEGRADATION OF ITS PERFORMANCE AND DURABILITY SUCH AS A PEN SLIDING DURABILITY BECOMES ABOUT ONE-TENTH COMPARED WITH THE ACTIVE AREA (AREA-(A) AS GUARANTEED AREA) AND ITS OPERATION FORCE REQUIRES ABOUT DOUBLE. ABOUT 0.5 MM OUTSIDE FROM A BOUNDARY OF THE ACTIVE AREA CORRESPONDS TO THIS AREA.

AREA(c) : PRESSING PROHIBITION AREA

THE AREA WHICH FORBIDS PRESSING, BECAUSE AN EXCESSIVE LOAD IS APPLIED TO A TRANSPARENT ELECTRODE (ITO) AND A SERIOUS DAMAGE IS GIVEN TO A TOUCH PANEL FUNCTION BY PRESSING.

AREA(d) : NON-ACTIVE AREA

THE AREA DOES NOT ACTIVATE EVEN IF PRESSED.

(2) CAUTIONS FOR INSTALLING AND ASSEMBLING

(i) DO NOT GIVE EXCESSIVE STRAIN TO THE PRODUCT.


(ii) FLEXIBLE PATTERN CABLE IS CONNECTED TO THE BODY BY THERMAL PRESSURE METHOD. SO, DO NOT APPLY EXCESSIVE FORCES TO THE FLEXIBLE PATTERN. DO NOT ADD AN EXCESSIVE FORCE TO A FPC(FLEX TAIL) THAT MAKES PEELING OFF OF THE FPC FROM THE PRODUCT. DO NOT FIX, ADHERE OR MOUNT ANY ADDITIONAL GOODS ON THE FPC SUCH AS ADDITIONAL FILM/PLATE ON THE FPC, BECAUSE SUCH ADDITIONAL GOODS WILL APPLY A STRESS AT THE FPC BONDING AREA. IT MAY AFFECT THE CONDUCTIVITY OF FPC WITH TOUCH PANEL.

(iii) IN ORDER NOT TO APPLY LOAD ON THE DISPLAY, PROVIDE A CLEARANCE OF AT LEAST 0.3MM BETWEEN THE PRODUCT AND DISPLAY.

(iv) WE RECOMMEND THE DESIGN OF A CASE OR BEZEL SHOULD COVERS THE BOUNDARY OF THE ACTIVE AREA INSIDE IN ORDER TO PREVENT AN OPERATION AT OUTSIDE OF THE ACTIVE AREA WHICH CAN NOT GUARANTEE THE FUNCTION OR DURABILITY (REFER TO ITEM 5.1.2. STRUCTURE, AREA DEFINITION).

BEZEL'S EDGE PART MAY GUIDE THE PEN SLIDING ON THE SAME POSITION REPEATEDLY. IF THE BEZEL IS PLACED OUTSIDE OF THE ACTIVE AREA, IT MAY CAUSE THE DAMAGE OF THE ITO FILM.

- (v) PRESSING INSIDE OF BOUNDARY OF THE FRAME(PART (A) AS SHOWN IN BELOW) MAY CAUSES FAULT OPERATION, SO PLEASE DESIGN TO AVOID PRESSING OF TOUCH PANEL AT PART (A) SUCH AS HAVING GASKET/CUSHION AT PART (C). PARTICULARLY THE AREA (B) SHALL BE FREE FROM BURR. THE GASKET/CUSHION MATERIAL AT THE PART (C) SHOULD NOT BE EXCEEDED TO INSIDE OF THE BOUNDARY OF THE FRAME.

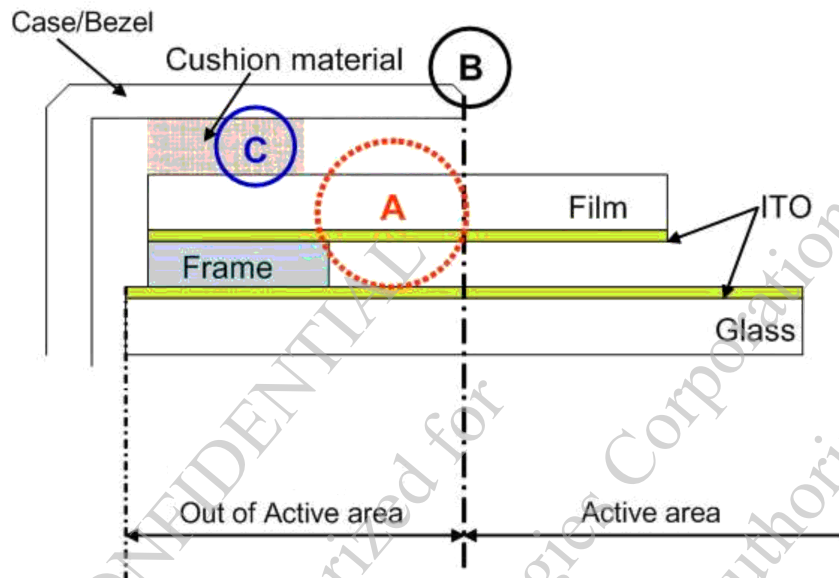

- (vi) TO PREVENT GIVING DISTORTION TO THE FILM OF THE PRODUCT AND PEELING OFF OF THE FILM FROM THE PRODUCT, DO NOT FIX THE FILM AND A SET CASE OR A SHOCK ABSORBING MATERIAL ADHERED TO A SET CASE BY ADHESION.
- (vii) WIPE OFF THE STAIN ON THE PRODUCT BY USING SOFT CLOTH MOISTENED WITH ETHANOL. TAKE CARE NOT TO ALLOW ETHANOL TO SOAK INTO THE JOINT OF UPPER FILM AND BOTTOM GLASS. IT MAY OTHERWISE CAUSE PEELING OR DEFECTIVE OPERATION. DO NOT USE ANY ORGANIC SOLVENT OR DETERGENT OTHER THAN ETHANOL.
- (viii) THE CORNERS OF THE PRODUCT ARE NOT CHAMFERED AND ARE SHARP. WHEN POSITIONING AND FIXING THE PRODUCT ON THE CASE, PROVIDE A ROUND PART ON THE CORNER OF THE CASE SO AS NOT TO APPLY LOAD ON THE CORNER OF THE TRANSPARENT TOUCH PANEL.
- (ix) DO NOT PRESS THE FILM OF THE PRODUCT WHEN THIS PRODUCT IS BUILT INTO A SET.
- (3) CAUTIONS FOR OPERATION
- (i) OPERATE IT WITH A POLYACETAL PEN (TIP R0.8 OR OVER) OR A BELLY OF A FINGER WITHOUT APPLYING EXCESSIVE LOAD. NEVER USE ANY MECHANICAL PENCILS, BALL POINT PENS AND HARD FINGERTIPS WHO'S TIP IS HARD FOR INPUT, OTHERWISE MALFUNCTIONS MAY RESULT.

- (ii) THE INPUT POSITION MAY BE FLUCTUATED A LITTLE THROUGH LONG-TIME USE. IT IS DESIRABLE TO PROVIDE A ZERO-ADJUSTMENT FUNCTION BY USING A CIRCUIT AND SOFTWARE.
- (iii) OPERATION AT THE OUT OF ACTIVE AREA IS OUT OF OUR GUARANTEE. IT CAUSES A SERIOUS DAMAGE OF A TRANSPARENT ELECTRODE. DO NOT OPERATE AT THE OUT OF ACTIVE AREA.
- (iv) IN CASE OF CLEANING THE PART OF THE CASE BOUNDARY OF ACCOMPLISHED SET, USE A SOFT CLOTH WITH A FINGER BERRY OR A COTTON BUD. DO NOT CLEAN WITH A THING OTHER THAN THE FINGER SUCH AS HARD OR SHARP EDGES LIKE A FINGER NAIL ETC. ON THE CLOTH, BECAUSE IT CAUSE TRANSPARENT CONDUCTIVE FILM CRACKS. PLEASE ADVISE THIS PROHIBITION TO YOUR LAST CUSTOMERS.

12.3 DURABILITY

12.3.1 STYLUS HITTING :

ONE MILLION TIMES OR OVER
NO DAMAGE ON FILM SURFACE

PEN : R8 mm SILICON RUBBER

LOAD : 250g

FREQUENCY : 3 times/sec

MEASUREMENT POSITION:

1 POINT OF TOUCH PANEL ACTIVE AREA

REPEATED : OVER 1,000,000 TIMES

12.3.2 PEN TOUCH SLIDING DURABILITY :

100,000 TIMES OR OVER


WRITING WITH R0.8mm PLASTIC STYLUS PEN; WRITING FORCE 250g
IN ACTIVE AREA.

SPEED IS 150mm/sec.

12.4 STEEL BALL DROP TEST

BY USING $\phi 9\text{mm}$ STEEL BALL FROM THE HEIGHT OF 30cm AND FALLING ON TOUCH PANEL SURFACE, MUST PASS BELOW CONDITIONS :

APPEARANCE : THE APPEARANCE WITHOUT ANY CHANGE, INCLUDING THE PANEL BROKEN.

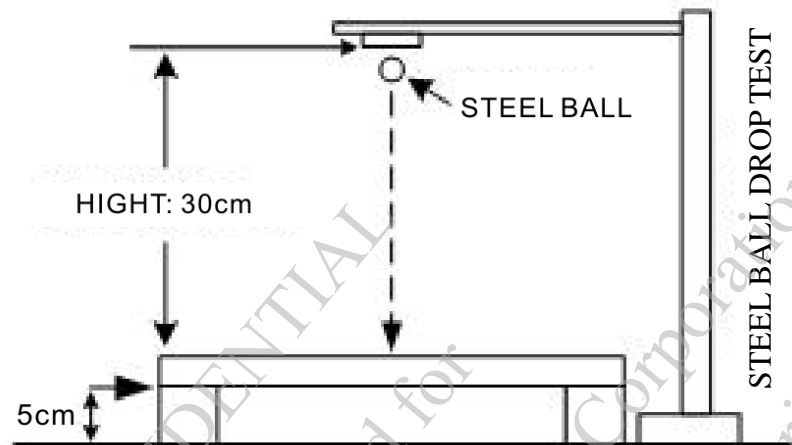

12.5 APPEARANCE INSPECTION

PURPOSE :

TO ESTABLISH APPEARANCE STANDARD AND MAINTAIN PRODUCT QUALITY .

SCOPE :

TOUCH PANEL VIEW AREA WITHIN TOUCH PANEL .

12.5.1 RULE :

INSPECTION CONDITION

(A) ENVIRONMENTAL LUMINANCE : 500 LUX .

(B) DISTANCE BETWEEN HUMAN EYES AND PANEL : 30 CM

(PANEL MUST BE TESTED UNDER LIGHT TRANSPARENT) .

(C) VISUAL ANGEL : $> 60^\circ$.

(D) LIGHT SOURCE : FLUORESCENT LIGHT SOURCE .




12.5.2 JUDGE CRITERION :

JUDGEMENT UNDER ABOVE MENTIONED CRITERION (PANEL MUST BE TESTED UNDER LIGHT TRANSPARENT),

TESTING GOODS DEFECT CAN BE VISIBLE WITHIN 10 SECONDS, WHICH WILL BE JUDGED AS MAJOR DEFECTS .

SAMPLING STANDARD :

THE SAMPLING STANDARD WILL BE CONFIRMED BY BOTH OF EDT AND CUSTOMER.

ITEM	INSPECTION METHOD	CRITERIA
1.SPOTS AND DOTS	$D \leq 0.15\text{mm}$	IGNORED
	$0.15\text{mm} < D \leq 0.3\text{mm}$	3 OR LESS (DISTANCE 5mm OVER)
	$D > 0.3\text{mm}$	NG
2. Scratch	$W \leq 0.05\text{mm}$	IGNORED
	$0.05\text{mm} < W \leq 0.1\text{mm}, L \leq 5.0\text{mm}$	3 OR LESS (DISTANCE 5mm OVER)
	$W > 0.1\text{mm}$	NG
3. Linear Foreign Matter	$W \leq 0.05\text{mm}$	IGNORED
	$0.05\text{mm} < W \leq 0.1\text{mm}, L \leq 5.0\text{mm}$	3 OR LESS (DISTANCE 5mm OVER)
	$W > 0.1\text{mm}$	NG
4. General Crack	 $X \leq 3\text{mm}, Y \leq 2\text{mm}, Z \leq t$	IGNORED
5. Corner Crack	 $X \leq 3\text{mm}, Y \leq 3\text{mm}, Z \leq t$	IGNORED
6. Bad Crack	 All shall be rejected. By naked eyes.	NG
7. Fish Eye	$\varnothing \leq 0.2\text{mm}$	IGNORED
	$0.2\text{mm} < \varnothing \leq 0.4\text{mm}$	3 OR LESS (DISTANCE 5mm OVER)
	$0.4\text{mm} < \varnothing \leq 0.5\text{mm}$	1 OR LESS (DISTANCE 5mm OVER)
	$\varnothing > 0.5\text{mm}$	NG

13. INSPECTION CRITERION

13.1 APPLICATION

THIS INSPECTION STANDARD IS TO BE APPLIED TO THE LCD MODULE DELIVERED FROM EMERGING DISPLAY TECHNOLOGIES CORP.(E.D.T) TO CUSTOMERS

13.2 INSPECTION CONDITIONS

13.2.1 (1)OBSERVATION DISTANCE : 35cm±5cm


(2)VIEW ANGLE :

NON-OPERATION CONDITION : ±5°

(PERPENDICULAR TO LCD PANEL SURFACE)

OPERATION CONDITION : ±45°

(PERPENDICULAR TO LCD PANEL SURFACE)

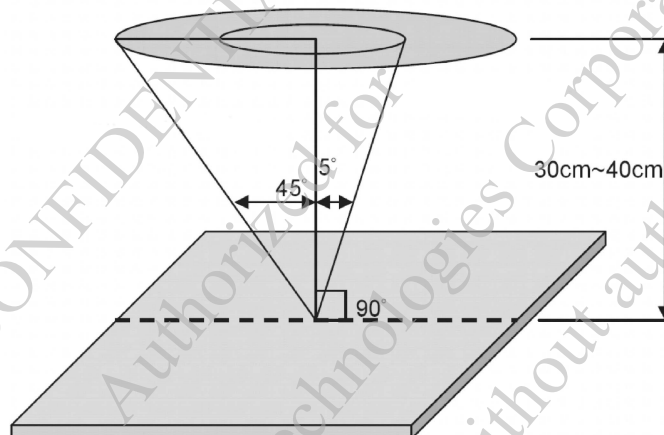

13.2.2 ENVIRONMENT CONDITIONS :

AMBIENT TEMPERATURE		20°C~25°C
AMBIENT HUMIDITY		65±20%RH
AMBIENT ILLUMINATION	COSMETIC INSPECTION	MORE THAN 600Lux
	FUNCTIONAL INSPECTION	300~500 Lux

13.2.3 INSPECTION LOT

QUANTITY PER DELIVERY LOT FOR EACH MODEL

13.2.4 INSPECTION METHOD

A SAMPLING INSPECTION SHALL BE MADE ACCORDING TO THE FOLLOWING PROVISIONS TO JUDGE THE ACCEPTABILITY

(a)APPLICABLE STANDARD :

MIL-STD-105E

NORMAL INSPECTION, SINGLE SAMPLING

LEVEL II

(b)AQL : MAJOR DEFECT : AQL 0.65


MINOR DEFECT : AQL 1.0


13.3 INSPECTION STANDARDS





13.3.1 VISUAL DEFECTS CLASSIFICATION


TYPE OF DEFECT	INSPECTION ITEM	DEFECT FEATURE	AQL
MAJOR DEFECT	1.DISPLAY ON	<ul style="list-style-type: none"> • DEFECT TO MISS SPECIFIED DISPLAY FUNCTION, FOR ALL AND SPECIFIED DOTS EX: DISCONNECTION, SHORT CIRCUIT ETC 	0.65
	2.BACKLIGHT	<ul style="list-style-type: none"> • NO LIGHT • FLICKERING AND OTHER ABNORMAL ILLUMINATION 	
	3.DIMENSIONS	<ul style="list-style-type: none"> • SUBJECT TO INDIVIDUAL ACCEPTANCE SPECIFICATIONS 	
MINOR DEFECT	1.DISPLAY ZONE	<ul style="list-style-type: none"> • BLACK/WHITE SPOT • BUBBLES ON POLARIZER • NEWTON RING • BLACK/WHITE LINE • SCRATCH • CONTAMINATION • LEVER COLOR SPREAD 	1.0
	2.BEZEL ZONE	<ul style="list-style-type: none"> • STAINS • SCRATCHES • FOREIGN MATTER 	
	3.SOLDERING	<ul style="list-style-type: none"> • INSUFFICIENT SOLDER • SOLDERED IN INCORRECT POSITION • CONVEX SOLDERING SPOT • SOLDER BALLS • SOLDER SCRAPS 	
	4.DISPLAY ON (ALL ON)	<ul style="list-style-type: none"> • LIGHT LINE 	





13.3.2 MODULE DEFECTS CLASSIFICATION

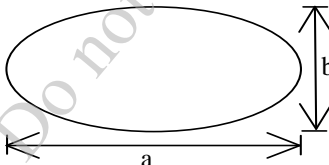NO.	ITEM	CRITERIA												
1	DISPLAY ON INSPECTION	(1)INCORRECT PATTERN (2)MISSING SEGMENT (3)DIM SEGMENT (4)OPERATING VOLTAGE BEYOND SPEC												
2	OVERALL DIMENSIONS	(1)OVERALL DIMENSION BEYOND SPEC												
3	DOT DEFECT	<div>(1) INSPECTION PATTERN: FULL WHITE, FULL BLACK, RED, GREEN AND BLUE SCREENS.</div> <div>(2)<table><tr><th>ITEMS</th><th>ACCEPTABLE COUNT</th></tr><tr><td>BRIGHT DOT</td><td>$N \leq 2$</td></tr><tr><td>DARK DOT</td><td>$N \leq 3$</td></tr><tr><td>TOAL BRIGHT AND DARK DOTS</td><td>$N \leq 4$</td></tr></table></div> <div>NOTE :</div> <div>1. THE DEFINITION OF DOT : THE SIZE OF A DEFECTIVE DOT OVER 1/2 OF WHOLE DOT IS REGARDED AS ONE DEFECTIVE DOT.</div> <div>2. BRIGHT DOT : DOTS APPEAR BRIGHT AND UNCHANGED IN SIZE IN WHICH LCD PANEL IS DISPLAYING UNDER BLACK PATTERN.</div> <div>3. DARK DOT : DOTS APPEAR DARK AND UNCHANGED IN SIZE IN WHICH LCD PANEL IS DISPLAYING UNDER PURE RED, GREEN, BLUE PICTURE.</div>	ITEMS	ACCEPTABLE COUNT	BRIGHT DOT	$N \leq 2$	DARK DOT	$N \leq 3$	TOAL BRIGHT AND DARK DOTS	$N \leq 4$				
ITEMS	ACCEPTABLE COUNT													
BRIGHT DOT	$N \leq 2$													
DARK DOT	$N \leq 3$													
TOAL BRIGHT AND DARK DOTS	$N \leq 4$													
4	FOREIGN BLACK/WHITE/ BRIGHT LINE/ SCRATCH OF VIEWING AREA	<table><tr><th>LENGTH : L</th><th>WIDTH : W</th><th>PERMISSIBLE NO.</th></tr><tr><td>$L \leq 0.3$</td><td>$W \leq 0.05$</td><td>IGNORE</td></tr><tr><td>$0.3 < L \leq 2.5$</td><td>$0.05 < W \leq 0.1$</td><td>4</td></tr><tr><td>$2.5 < L$</td><td>$0.1 < W$</td><td>NONE</td></tr></table> <div>WIDTH : W mm, LENGTH : L mm</div>	LENGTH : L	WIDTH : W	PERMISSIBLE NO.	$L \leq 0.3$	$W \leq 0.05$	IGNORE	$0.3 < L \leq 2.5$	$0.05 < W \leq 0.1$	4	$2.5 < L$	$0.1 < W$	NONE
LENGTH : L	WIDTH : W	PERMISSIBLE NO.												
$L \leq 0.3$	$W \leq 0.05$	IGNORE												
$0.3 < L \leq 2.5$	$0.05 < W \leq 0.1$	4												
$2.5 < L$	$0.1 < W$	NONE												
5	FOREIGN MATTER \ BLACK SPOTS \ WHITE SPOTS \ DENT (INCLUDING LIGHT LEAKAGE DUE TO POLARIZING PLATES PINHOLES, ETC.)	<table><tr><th>AVERAGE DIAMETER (mm): D</th><th>NUMBER OF PIECES PERMITTED</th></tr><tr><td>$D \leq 0.15$</td><td>IGNORE</td></tr><tr><td>$0.15 < D \leq 0.5$</td><td>4</td></tr><tr><td>$0.5 < D$</td><td>NONE</td></tr></table> <div>NOTE : DIAMETER $D=(a+b)/2$</div> <div></div>	AVERAGE DIAMETER (mm): D	NUMBER OF PIECES PERMITTED	$D \leq 0.15$	IGNORE	$0.15 < D \leq 0.5$	4	$0.5 < D$	NONE				
AVERAGE DIAMETER (mm): D	NUMBER OF PIECES PERMITTED													
$D \leq 0.15$	IGNORE													
$0.15 < D \leq 0.5$	4													
$0.5 < D$	NONE													

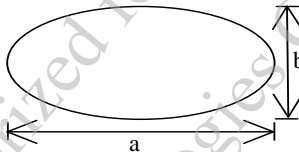NO.	ITEM	CRITERIA																				
6	BUBBLES OF POLARIZER /DIRT/CF FAIL /SURFACE STAINS	<table><tr><td></td><td>AVERAGE DIAMETER (mm) : D</td><td>NUMBER OF PIECES PERMITTED</td></tr><tr><td rowspan="3">BUBBLE ON THE POLARIZER</td><td>$D \leq 0.25$</td><td>IGNORE</td></tr><tr><td>$0.25 < D \leq 0.5$</td><td>$N \leq 5$</td></tr><tr><td>$0.5 < D$</td><td>NOTE</td></tr><tr><td rowspan="2">SURFACE STATUS</td><td>$D < 0.1 \text{ mm}$</td><td>IGNORE</td></tr><tr><td>$0.1 < D \leq 0.3\text{mm}$</td><td>$N \leq 3$</td></tr><tr><td rowspan="2">CF FAIL / SPOT</td><td>$D < 0.1 \text{ mm}$</td><td>IGNORE</td></tr><tr><td>$0.1 < D \leq 0.3\text{mm}$</td><td>$N \leq 3$</td></tr></table>		AVERAGE DIAMETER (mm) : D	NUMBER OF PIECES PERMITTED	BUBBLE ON THE POLARIZER	$D \leq 0.25$	IGNORE	$0.25 < D \leq 0.5$	$N \leq 5$	$0.5 < D$	NOTE	SURFACE STATUS	$D < 0.1 \text{ mm}$	IGNORE	$0.1 < D \leq 0.3\text{mm}$	$N \leq 3$	CF FAIL / SPOT	$D < 0.1 \text{ mm}$	IGNORE	$0.1 < D \leq 0.3\text{mm}$	$N \leq 3$
			AVERAGE DIAMETER (mm) : D	NUMBER OF PIECES PERMITTED																		
		BUBBLE ON THE POLARIZER	$D \leq 0.25$	IGNORE																		
			$0.25 < D \leq 0.5$	$N \leq 5$																		
			$0.5 < D$	NOTE																		
		SURFACE STATUS	$D < 0.1 \text{ mm}$	IGNORE																		
			$0.1 < D \leq 0.3\text{mm}$	$N \leq 3$																		
		CF FAIL / SPOT	$D < 0.1 \text{ mm}$	IGNORE																		
			$0.1 < D \leq 0.3\text{mm}$	$N \leq 3$																		
		NOTE : (1)POLARIZER BUBBLE IS DEFINED AS THE BUBBLE APPEARS ON ACTIVE DISPLAY AREA. THE DEFECT OF POLARIZER BUBBLE SHALL BE IGNORED IF THE POLARIZER BUBBLE APPEARS ON THE OUTSIDE OF ACTIVE DISPLAY AREA. (2)THE EXTRANEIOUS SUBSTANCE IS DEFINED AS IT CAN BE OBSERVED WHEN THE MODULE IS POWER ON. (3)THE DEFINITION OF AVERAGE DIAMETER, D IS DEFINED AS FOLLOWING. AVERAGE DIAMETER (D)=(a+b)/2																				
																						
7	LINE DEFECT ON DISPLAY	OBVIOUS VERTICAL OR HORIZONTAL LINE DEFECT IS NOT ALLOW																				
8	MURA ON DISPLAY	IT'S OK IF MURA IS SLIGHT VISIBLE THROUNG 6% ND FILTER																				
9	UNEVEN COLOR SPREAD, COLORATION	(1)TO BE DETERMINED BASED UPON THE STANDARD SAMPLE.																				
10	BEZEL APPEARANCE	(1)BEZEL MAY NOT HAVE RUST, BE DEFORMED OR HAVE FINGER PRINTS STAINS OF OTHER CONTAMINATION. (2)BEZEL MUST COMPLY WITH JOB SPECIFICATIONS.																				
11	PCB	(1)THERE MAY NOT BE MORE THAN 2mm OF SEALANT OUTSIDE THE SEAL AREA ON THE PCB, AND THERE SHOULD BE NO MORE THAN THREE PLACES. (2)NO OXIDATION OR CONTAMINATION PCB TERMINALS. (3)PARTS ON PCB MUST BE THE SAME AS ON THE PRODUCTION CHARACTERISTIC CHART. THERE SHOULD BE NO WRONG PARTS, MISSING PARTS OR EXCESS PARTS. (4)THE JUMPER ON THE PCB SHOULD CONFORM TO THE PRODUCT CHARACTERISTIC CHART. (5)IF SOLDER GETS ON BEZEL TAB PADS, LED PAD, ZEBRA PAD OR SCREW HOLD PAD; MAKE SURE IT IS SMOOTHED DOWN.																				

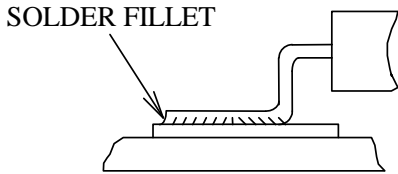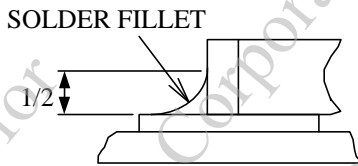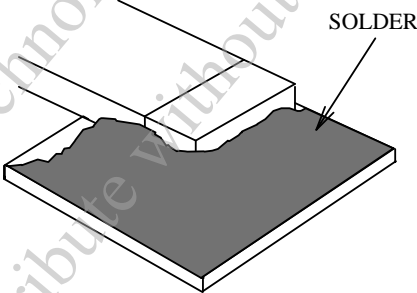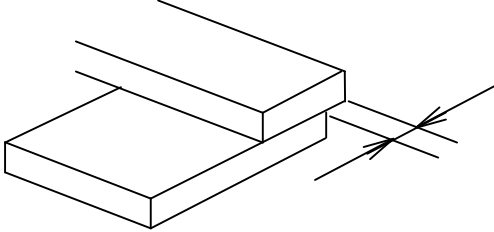
NO.	ITEM	CRITERIA
12	SOLDERING	<p>(1)NO SOLDERING FOUND ON THE SPECIFIED PLACE</p> <p>(2)INSUFFICIENT SOLDER</p> <p>(a)LSI, IC A POOR WETTING OF SOLDER IS BETWEEN LOWER BEND OR "HEEL" OF LEAD AND PAD</p>  <p>(b)CHIP COMPONENT · SOLDER IS LESS THAN 50% OF SIDES AND FRONT FACE WETTING</p>  <p>· SOLDER WETS 3 SIDES OF TERMINAL, BUT LESS THAN 25% OF SIDES AND FRONT SURFACE AREA ARE COVERED</p>  <p>(3)PARTS ALIGNMENT</p> <p>(a)LSI, IC LEAD WIDTH IS MORE THAN 50% BEYOND PAD OUTLINE</p> 

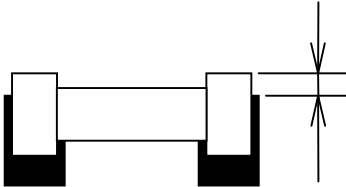NO.	ITEM	CRITERIA
12	SOLDERING	<p>(b)CHIP COMPONENT COMPONENT IS OFF CENTER, AND MORE THAN 50% OF THE LEADS IS OFF THE PAD OUTLINE</p>  <p>(4)NO UNMELTED SOLDER PASTE MAY BE PRESENT ON THE PCB. (5)NO COLD SOLDER JOINTS, MISSING SOLDER CONNECTIONS, OXIDATION OR ICICLE. (6)NO RESIDUE OR SOLDER BALLS ON PCB. (7)NO SHORT CIRCUITS IN COMPONENTS ON PCB.</p>
13	BACKLIGHT	<p>(1)NO LIGHT (2)FLICKERING AND OTHER ABNORMAL ILLUMINATION (3)SPOTS OR SCRATCHES THAT APPEAR WHEN LIT MUST BE JUDGED USING LCD SPOT, LINES AND CONTAMINATION STANDARDS. (4)BACKLIGHT DOESN'T LIGHT OR COLOR IS WRONG.</p>
14	GENERAL APPEARANCE	<p>(1)NO OXIDATION, CONTAMINATION, CURVES OR, BENDS ON INTERFACE PIN (OLB) OF TCP. (2)NO CRACKS ON INTERFACE PIN (OLB) OF TCP. (3)NO CONTAMINATION, SOLDER RESIDUE OR SOLDER BALLS ON PRODUCT. (4)THE IC ON THE TCP MAY NOT BE DAMAGED, CIRCUITS. (5)THE UPPERMOST EDGE OF THE PROTECTIVE STRIP ON THE INTERFACE PIN MUST BE PRESENT OR LOOK AS IF IT CAUSE THE INTERFACE PIN TO SEVER. (6)THE RESIDUAL ROSIN OR TIN OIL OF SOLDERING (COMPONENT OR CHIP COMPONENT) IS NOT BURNED INTO BROWN OR BLACK COLOR. (7)SEALANT ON TOP OF THE ITO CIRCUIT HAS NOT HARDENED. (8)PIN TYPE MUST MATCH TYPE IN SPECIFICATION SHEET. (9)LCD PIN LOOSE OR MISSING PINS. (10)PRODUCT PACKAGING MUST THE SAME AS SPECIFIED ON PACKAGING SPECIFICATION SHEET. (11)PRODUCT DIMENSION AND STRUCTURE MUST CONFORM TO PRODUCT SPECIFICATION SHEET. (12)THE APPEARANCE OF HEAT SEAL SHOULD NOT ADMIT ANY DIRT AND BREAK.</p>

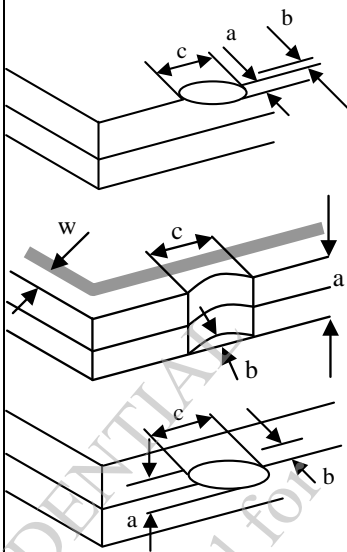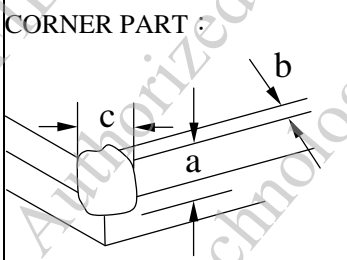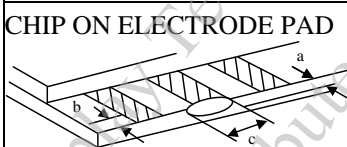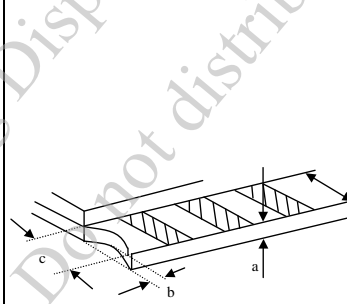NO.	ITEM	CRITERIA										
15	CRACKED GLASS	THE LCD WITH EXTENSIVE CRACK IS NOT ACCEPTABLE										
		GENERAL GLASS CHIP : 	<table><tr><th>a</th><th>b</th><th>c</th></tr><tr><td>$\leq t/2$</td><td>< VIEWING AREA</td><td>$\leq 1/8X$</td></tr><tr><td>$t/2 > , \leq 2t$</td><td>$\leq W/2$</td><td>$\leq 1/8X$</td></tr></table> <p>*W=DISTANCE BETWEEN SEALANT AREA AND LCD PANEL EDGE X = LCD SIDE LENGTH t = GLASS THICKNESS</p>	a	b	c	$\leq t/2$	< VIEWING AREA	$\leq 1/8X$	$t/2 > , \leq 2t$	$\leq W/2$	$\leq 1/8X$
		a	b	c								
		$\leq t/2$	< VIEWING AREA	$\leq 1/8X$								
		$t/2 > , \leq 2t$	$\leq W/2$	$\leq 1/8X$								
CORNER PART : 	<table><tr><th>a</th><th>b</th><th>c</th></tr><tr><td>$\leq t/2$</td><td>< VIEWING AREA</td><td>$\leq 1/8X$</td></tr><tr><td>$> t/2 , \leq 2t$</td><td>$\leq W/2$</td><td>$\leq 1/8X$</td></tr></table> <p>*W=DISTANCE BETWEEN SEALANT AREA AND LCD PANEL EDGE X = LCD SIDE LENGTH t = GLASS THICKNESS</p>	a	b	c	$\leq t/2$	< VIEWING AREA	$\leq 1/8X$	$> t/2 , \leq 2t$	$\leq W/2$	$\leq 1/8X$		
a	b	c										
$\leq t/2$	< VIEWING AREA	$\leq 1/8X$										
$> t/2 , \leq 2t$	$\leq W/2$	$\leq 1/8X$										
CHIP ON ELECTRODE PAD 	<table><tr><th>a</th><th>b</th><th>c</th></tr><tr><td>$\leq t$</td><td>$\leq 0.5\text{mm}$</td><td>$\leq 1/8X$</td></tr></table> <p>* X=LCD SIDE WIDTH t=GLASS THICKNESS</p>	a	b	c	$\leq t$	$\leq 0.5\text{mm}$	$\leq 1/8X$					
a	b	c										
$\leq t$	$\leq 0.5\text{mm}$	$\leq 1/8X$										
	<table><tr><th>a</th><th>b</th><th>c</th></tr><tr><td>$\leq t$</td><td>$\leq 1/8X$</td><td>$\leq L$</td></tr></table> <p>*X=LCD SIDE WIDTH t = GLASS THICKNESS L=ELECTRODE PAD LENGTH ①IF GLASS CHIPPING THE ITO TERMINAL, OVER 2/3 OF THE ITO MUST REMAIN AND BE, INSPECTED ACCORDING TO ELECTRODE TERMINAL SPECIFICATIONS ②IF THE PRODUCT WILL BE HEAT SEALED BY THE CUSTOMER, THE ALIGNMENT MARK MUST NOT BE DAMAGED</p>	a	b	c	$\leq t$	$\leq 1/8X$	$\leq L$					
a	b	c										
$\leq t$	$\leq 1/8X$	$\leq L$										

13.4 RELIABILITY TEST

13.4.1 STANDARD SPECIFICATIONS FOR RELIABILITY OF LCD MODULE

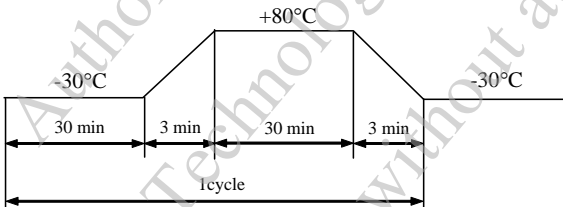NO.	ITEM	DESCRIPTION
1	HIGH TEMPERATURE OPERATION	THE SAMPLE SHOULD BE ALLOWED TO STAND AT +70°C FOR 240 HRS
2	LOW TEMPERATURE OPERATION	THE SAMPLE SHOULD BE ALLOWED TO STAND AT -20°C FOR 240 HRS
3	HIGH TEMPERATURE STORAGE	THE SAMPLE SHOULD BE ALLOWED TO STAND AT +80°C FOR 240 HRS
4	LOW TEMPERATURE STORAGE	THE SAMPLE SHOULD BE ALLOWED TO STAND AT -30°C FOR 240 HRS
5	HIGH TEMP / HUMIDITY TEST STORAGE	THE SAMPLE SHOULD BE ALLOWED TO STAND AT 60°C, 90% RH 240 HRS
6	THERMAL SHOCK (NOT OPERATED)	<p>THE SAMPLE SHOULD BE ALLOWED TO STAND THE FOLLOWING 10 CYCLES OF OPERATION:</p> 
7	ESD (ELECTROSTATIC DISCHARGE) (NOT OPERATED)	<p>AIR DISCHARGE $\pm 12\text{KV}$ CONTACT DISCHARGE $\pm 8\text{KV}$ ACCORDING TO IEC-61000-4-2</p>

NOTE (1) : THE TEST SAMPLES HAVE RECOVERY TIME FOR 2 HOURS AT ROOM TEMPERATURE BEFORE THE FUNCTION CHECK. IN THE STANDARD CONDITIONS, THERE IS NO DISPLAY FUNCTION NG ISSUE OCCURRED.


13.5 TESTING CONDITIONS AND INSPECTION CRITERIA

FOR THE FINAL TEST THE TESTING SAMPLE MUST BE STORED AT ROOM TEMPERATURE FOR 24 HOURS, AFTER THE TESTS LISTED IN TABLE 12.5, STANDARD SPECIFICATIONS FOR RELIABILITY HAVE BEEN EXECUTED IN ORDER TO ENSURE STABILITY.

NO	ITEM	TEST MODEL	INSPECTION CRITERIA
1	CURRENT CONSUMPTION	REFER TO SPECIFICATION	THE CURRENT CONSUMPTION SHOULD CONFORM TO THE PRODUCT SPECIFICATION.
2	CONTRAST	REFER TO SPECIFICATION	AFTER THE TESTS HAVE BEEN EXECUTED, THE CONTRAST MUST BE LARGER THAN HALF OF ITS INITIAL VALUE PRIOR TO THE TESTS.
3	APPEARANCE	VISUAL INSPECTION	DEFECT FREE

13.6 OPERATION

- 13.6.1 DO NOT CONNECT OR DISCONNECT MODULES TO OR FROM THE MAIN SYSTEM WHILE POWER IS BEING SUPPLIED .
- 13.6.2 USE THE MODULE WITHIN SPECIFIED TEMPERATURE ; LOWER TEMPERATURE CAUSES THE RETARDATION OF BLINKING SPEED OF THE DISPLAY ; HIGHER TEMPERATURE MAKES OVERALL DISPLAY DISCOLOR . WHEN THE TEMPERATURE RETURNS TO NORMALITY, THE DISPLAY WILL OPERATE NORMALLY.
- 13.6.3 ADJUST THE LC DRIVING VOLTAGE TO OBTAIN THE OPTIMUM CONTRAST .
- 13.6.4 POWER ON SEQUENCE INPUT SIGNALS SHOULD NOT BE SUPPLIED TO LCD MODULE BEFORE POWER SUPPLY VOLTAGE IS APPLIED AND REACHES THE SPECIFIED VALUE.
IF ABOVE SEQUENCE IS NOT FOLLOWED , CMOS LSIS OF LCD MODULES MAY BE DAMAGED DUE TO LATCH - UP PROBLEM.
- 13.6.5 NOT ALLOWED TO INFLICT ANY EXTERNAL STRESS AND TO CAUSE ANY MECHANICAL INTERFERENCE ON THE BENDING AREA OF FPC DURING THE TAIL BENDING BACKWARDS!
DO NOT STRESS FPC AND IC ON THE MODULE!

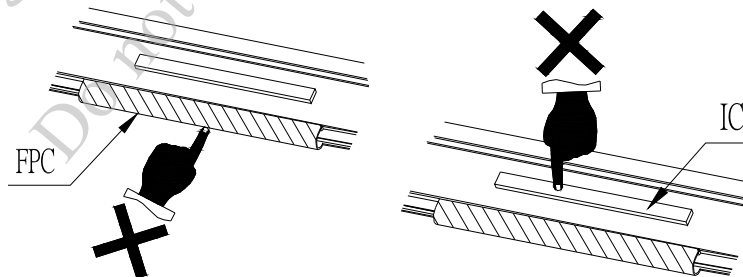

13.7 NOTICE

- 13.7.1 USE A GROUNDED SOLDERING IRON WHEN SOLDERING CONNECTOR I/O TERMINALS . FOR SOLDERING OR REPAIRING, TAKE PRECAUTION AGAINST THE TEMPERATURE OF THE SOLDERING IRON AND THE SOLDERING TIME TO PREVENT PEELING OFF THE THROUGH-HOLE-PAD .
- 13.7.2 DO NOT DISASSEMBLE . EDT SHALL NOT BE HELD RESPONSIBLE IF THE MODULE IS DISASSEMBLED AND UPON THE REASSEMBLY THE MODULE FAILED.
- 13.7.3 DO NOT CHARGE STATIC ELECTRICITY, AS THE CIRCUIT OF THIS MODULE CONTAINS CMOS LSIS. A WORKMAN'S BODY SHOULD ALWAYS BE STATIC-PROTECTED BY USE OF AN ESD STRAP. WORKING CLOTHES FOR SUCH PERSONNEL SHOULD BE OF STATIC-PROTECTED MATERIAL.
- 13.7.4 ALWAYS GROUND THE ELECTRICALLY-POWERED DRIVER BEFORE USING IT TO INSTALL THE LCD MODULE. WHILE CLEANING THE WORK STATION BY VACUUM CLEANER, DO NOT BRING THE SUCKING MOUTH NEAR THE MODULE ; STATIC ELECTRICITY OF THE ELECTRICALLY-POWERED DRIVER OR THE VACUUM CLEANER MAY DESTROY THE MODULE.
- 13.7.5 DON'T GIVE EXTERNAL SHOCK.
- 13.7.6 DON'T APPLY EXCESSIVE FORCE ON THE SURFACE.
- 13.7.7 LIQUID IN LCD IS HAZARDOUS SUBSTANCE. MUST NOT LICK AND SWALLOW.
WHEN THE LIQUID IS ATTACH TO YOUR, SKIN, CLOTH ETC. WASH IT OUT THOROUGHLY AND IMMEDIATELY.
- 13.7.8 DON'T OPERATE IT ABOVE THE ABSOLUTE MAXIMUM RATING.
- 13.7.9 STORAGE IN A CLEAN ENVIRONMENT, FREE FROM DUST, ACTIVE GAS, AND SOLVENT.
- 13.7.10 STORE WITHOUT ANY PHYSICAL LOAD.
- 13.7.11 REWIRING: NO MORE THAN 3 TIMES.